

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 24, Township 107, Range 43, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On _____ found a _____
DATE


left monument as found, lowered monument, removed monument (explain)

On 05-18-2011 placed a PK nail with seal #43844.
DATE

SKETCH OF REFERENCE TIES



X X X X

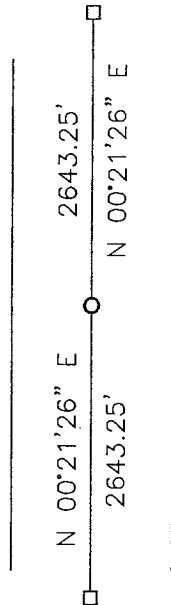


Minnesota State Plane Coordinate System Murray County Datum NAD83 (1996)

N: 176853.679
E: 453474.861

Corner is 2'± south of fence to west.
Corner is 1'± east of center of road.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

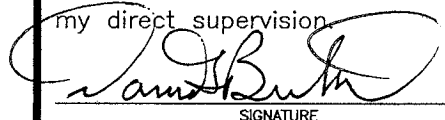
SIGNATURE

1/23/12
DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of JAN 25 2012 A.D. 20____

County Recorder James V. Johnson
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

(No Date) J. W. Myers did the original survey of the township lines.

On May 18, 2011, Bueltel-Moseng Land Surveying set a PK nail with seal #43844 midway and on line between the section corners.