

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 28, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 8/24/2025 found a 8"x10" field stone 0.8'± below the road surface, set a 5/8" iron with seal #43844 along the north side of the stone for locating purposes.

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_

SKETCH OF REFERENCE TIES

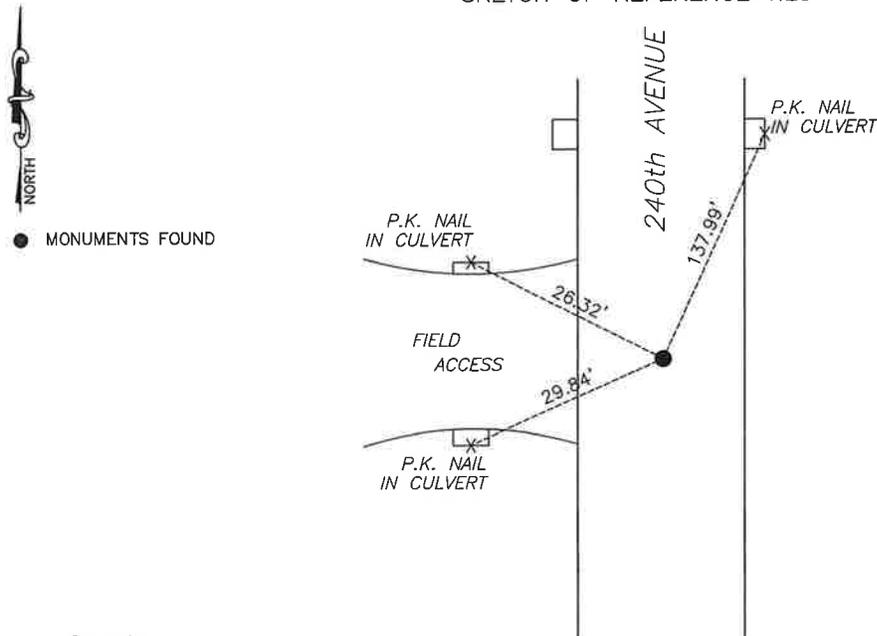

Murray County  
Coordinate System NAD83 (1996)  
N: 171404.995  
E: 564200.478

WGS84  
LAT: 44°02'37.1707"  
LON: -95°31'21.1063"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel  
License No. 43844

2/2/2026  
DATE

MURRAY COUNTY RECORDER

FEB 06 2026

## Statement of Evidence

### East Quarter Corner Section 28, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey of section 28 by J.W. Woolstencroft dated November 15, 1904 notes a stone monument at the corner.

County records dated January 28, 2015 notes that Zieske Land Surveying found an iron monument at the corner.

On August 27, 2020 Westwood Professional Services found a bent No. 3 iron at the corner.

On August 24, 2025 Bueltel-Moseng Land Surveying found a bent  $\frac{3}{8}$ " iron at the corner, recorded the position, removed and dug for the stone from the 1904 survey. Found a 8"x10" field stone 0.8'± below the road surface, accepted the stone as the corner and set a  $\frac{5}{8}$ " iron with seal #43844 along the north side of the stone for locating purposes.