

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 3, Township 105 N, Range 41 W, 5 TH P.M.



STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 06/23/2017 found a IRON PIN NEAR CENTERLINE OF ROAD NORTH-SOUTH, IN LINE WITH  
DATE  
FENCE LINE TO WEST

left monument as found,  lowered monument  removed monument (explain)

On \_\_\_\_\_ place a \_\_\_\_\_  
DATE

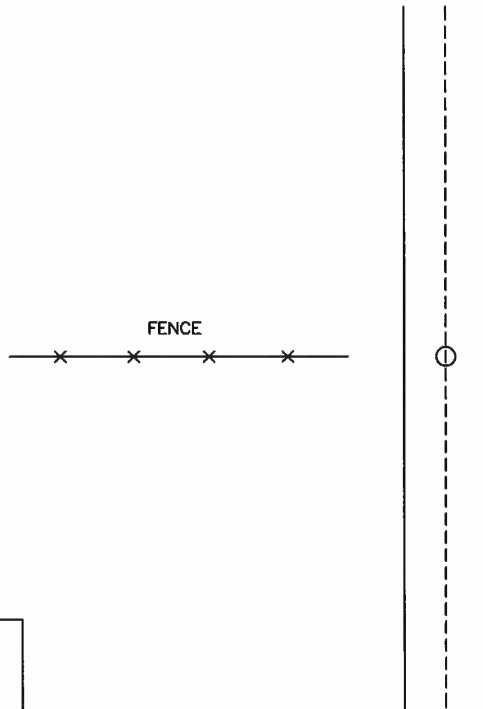

MURRAY COUNTY  
COORDINATE  
(2011 ADJUSTMENT)

N:129098.848  
E:506086.817

Statement of evidence and reference ties relative to the corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]  
SIGNATURE

8-24-17  
DATE

License No. 49020

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER

County of \_\_\_\_\_

I hereby certify that this document was filed in the Co Recorders office at \_\_\_\_\_  
.M. on the \_\_\_\_\_ day of \_\_\_\_\_ A.D. 20

County Recorder \_\_\_\_\_

By \_\_\_\_\_, Deputy

DOCUMENT NO. \_\_\_\_\_

Statement of Evidence:

1861 – Corner established during survey of subdivision of township.

1957 – MNDNR Assumed position for corner to be at the intersection of road centerline in line with fence line to west.

1973 – MNDNR set 3/4" I.P

2017 – Jibben Surveying found an iron pin near the intersection of road center lines north-south in line with fence line to west. Held pin as corner.

SECTION 2  
TOWNSHIP 105 NORTH, RANGE 41 WEST

