

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 30, Township 108, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On _____ found a _____
- DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6/27/14 placed a 5/8" iron w/seal #43844
- DATE

SKETCH OF REFERENCE TIES

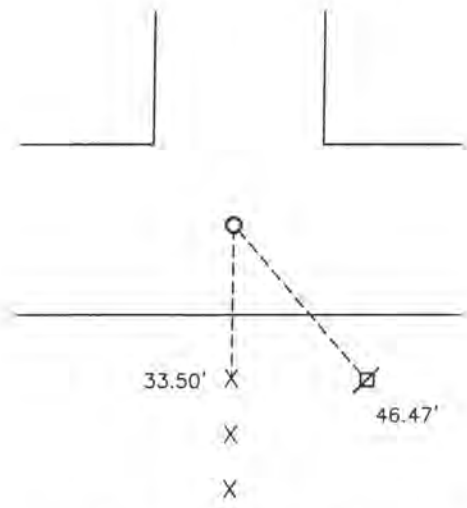

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)
N: 203276.797
E: 458747.067

PK Nail in top of corner fence post South 33.50'
PK Nail in utility pole SE 46.47'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

David Smith 1/14/15
SIGNATURE DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of FEB 20 2015 A.D. 20 _____

County Recorder *Evelyn C. Larson*

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L.G.W. Fletcher did the original subdivision of the township.

On June 27, 2014, Bueltel-Moseng Land Surveying dug with backhoe in center of the intersection and midway and on line between section corners. Found nothing. Set $\frac{5}{8}$ " iron with seal #43844 midway and on line between section corners.