

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 33, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 7/17/2025 found a 6"x6"x8" field stone $2' \pm$ beneath the road surface.
DATE

left monument as found, lowered monument, removed monument (explain)

On 7/30/2025 placed a 5/8" iron with seal #43844 over top of the stone.
DATE

SKETCH OF REFERENCE TIES

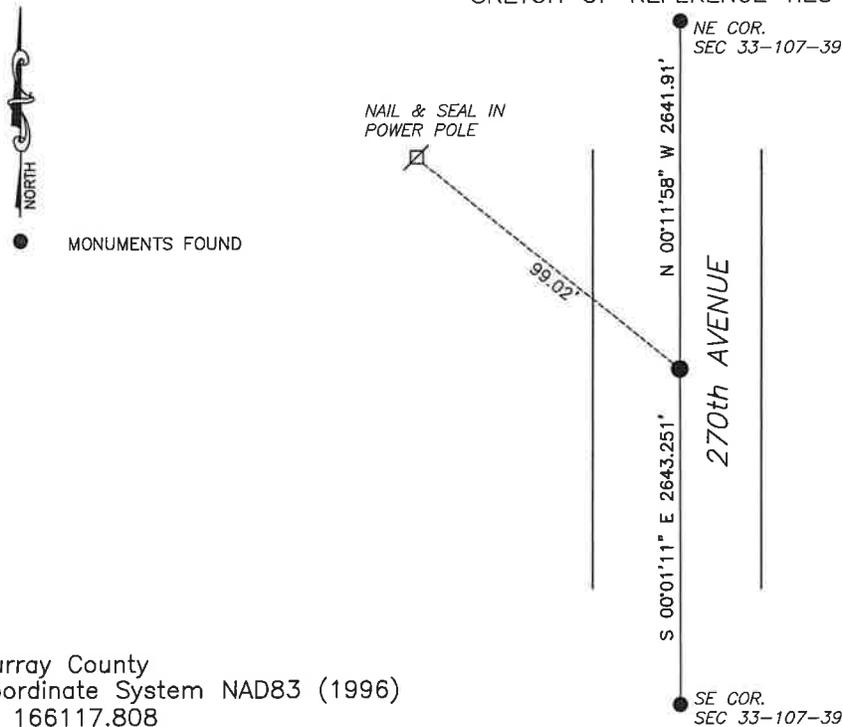

Murray County
 Coordinate System NAD83 (1996)
 N: 166117.808
 E: 564228.341

WGS84
 LAT: 44°01'44.9610"
 LON: -95°31'20.9393"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 10/21/2025
 Daniel L. Bueltel DATE
 License No. 43844

OCT 24 2025

Karen Brown

MURRAY COUNTY RECORDER

Statement of Evidence

East Quarter Corner Section 33, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

On July 17, 2025 Bueltel-Moseng Land Surveying dug with a backhoe midway between the section corners and in the center line of the township road. Found a 6"x6"x8" field stone 2'± beneath the road surface. Recorded the position and kept digging, found nothing else.

Accepted the position of the stone. Placed a $\frac{5}{8}$ " iron with seal #43844 over top of the stone.