

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 34, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On July 9, 2025 found a 3/4" iron, probed along side and hit concrete monument below
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

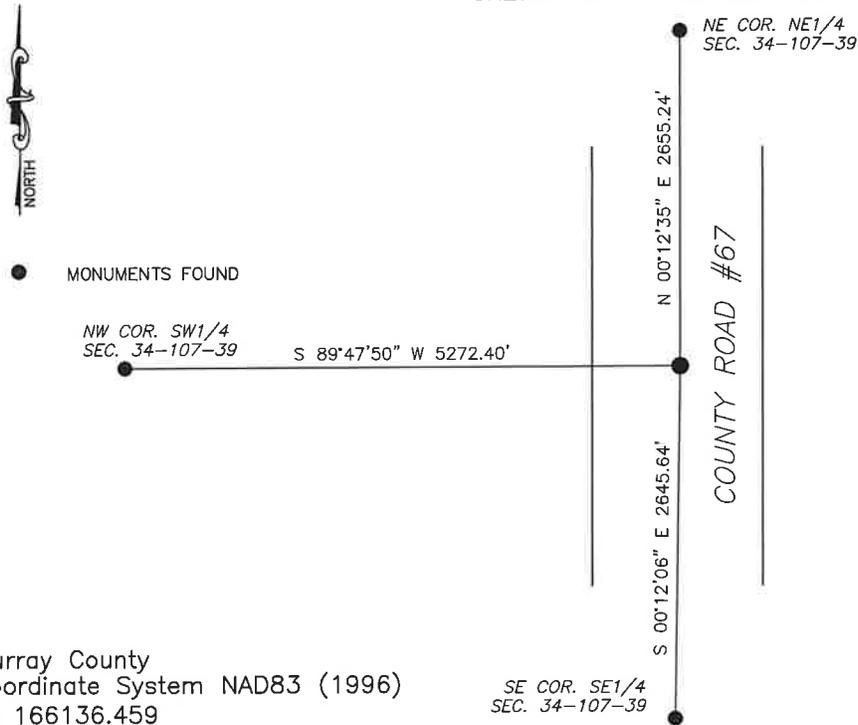


Murray County
 Coordinate System NAD83 (1996)
 N: 166136.459
 E: 569500.710

SE COR. SE1/4
 SEC. 34-107-39

WGS84
 LAT: 44°01'44.9846"
 LON: -95°30'08.7787"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel
 License No. 43844
DATE 10/21/2025

OCT 24 2025


 MURRAY COUNTY RECORDER

Statement of Evidence

East Quarter corner Section 34, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey of section 34 dated February 5, 1934 notes a concrete monumnet with a "+" chiseled on top.

County records dated 1967 notes an iron pin placed at the corner.

County records dated May 21, 2012 notes a $\frac{3}{4}$ " iron located at the corner.

On July 9, 2025 Bueltel-Moseng Land Surveying searched the area and found a $\frac{3}{4}$ " iron, probed along side the iron and hit the concrete monument below. Accepted the $\frac{3}{4}$ " iron as the monument.