

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 36, Township 105, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

☒ On 5/11/2026 found a 3/4" steel pin 1.5'± below the road surface.
DATE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7/7/2026 placed a survey spike with seal #43844.
DATE

SKETCH OF REFERENCE TIES

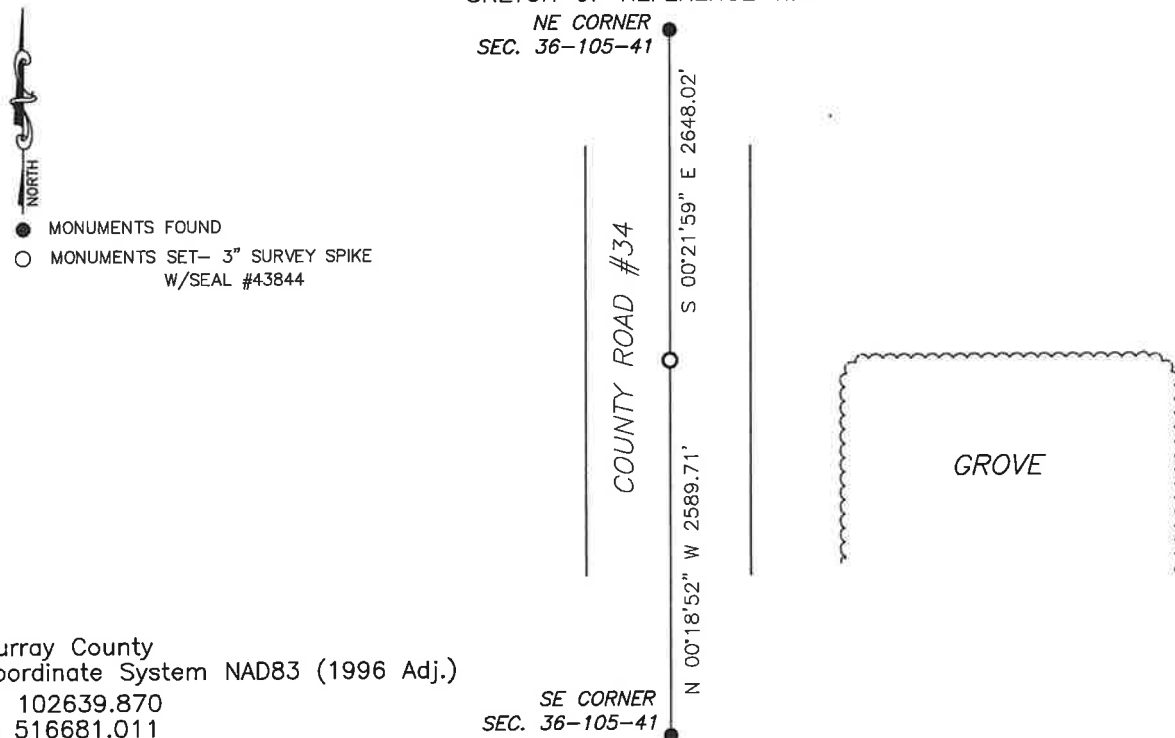

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 102639.870
E: 516681.011

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

7/30/2026
DATE

RECORDING INFORMATION

JUL 31 2026

MURRAY COUNTY RECORDER

Statement of Evidence

East Quarter Corner Section 36, T105N, R41W of the 5th P.M.

September 1858 - W.J. Neely surveyed the south township boundary.

July, 1861 - J.W. Myers surveyed the east, north, and west township boundary lines.

August&September 1861 - Wellman & Smoot subdivided the township.

May 15, 1925 - County survey record of Section 36 notes a stone in the east edge of grade.

April 21, 1980 - County records note a field stone located at the corner and place a 1"x2' long bar above the stone.

August 19, 1994 - County records note a steel pin located at the corner and set a p.k. nail above the steel pin.

May 11, 2026 - Bueltel-Moseng Land Surveying found a p.k. nail above a $\frac{3}{4}$ " steel pin at the corner.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 at the location of the p.k. nail.