

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 5, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/8/2025 placed a 3" survey spike wiht seal 43844
DATE

SKETCH OF REFERENCE TIES

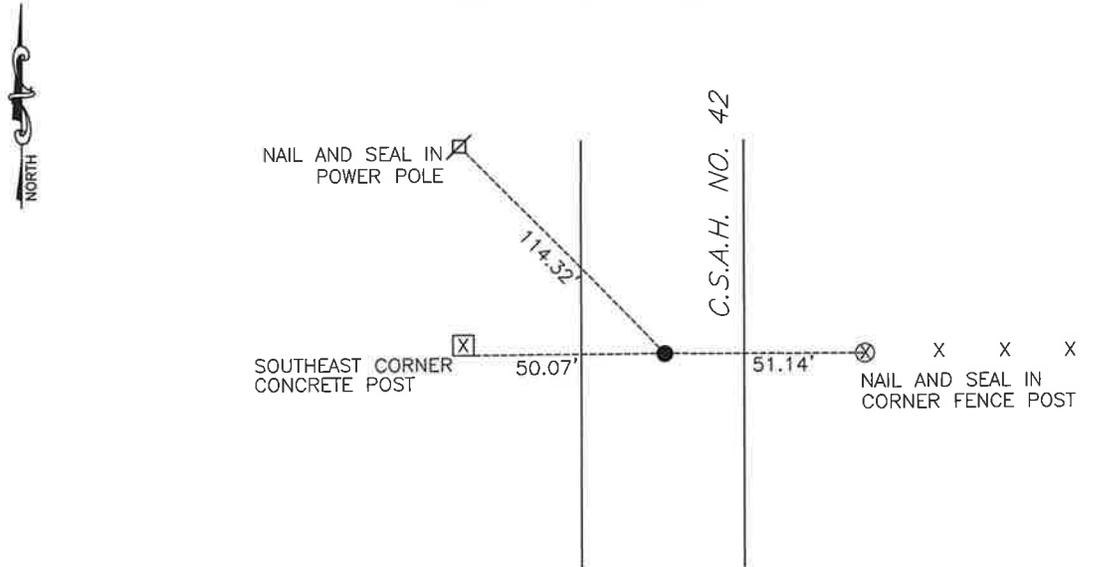

Murray County
Coordinate System NAD83 (1996)
N: 129087.002
E: 559046.636

WGS84
LAT: 43°55'39.4379"
LON: -95°32'33.2363"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

1/16/2026
DATE

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

EAST QUARTER CORNER SECTION 5, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

August 11, 1926, old survey notes a stone monument found.

Murray County Highway Department grading plans from 1961 show a stone was found at the corner.

County records from 1976 note corner was excavated to locate stone but found nothing. Notes that the stone could have been removed during 1972 regrade that has a 2' sub cut.

March 6, 2025, Bueltel-Moseng Land Surveying searched intersection for corner and found nothing. Re-established corner using stationing and deflection angles from 1986 highway plans between the southeast corner of 5-105-39 and the northeast corner of 32-106-39. Using this method placed corner in center of road and 50' east of concrete post.

October 8, 2025, Bueltel-Moseng Land Surveying placed a 3" survey spike with seal 43844.