

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 6, Township 106, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 11-12-2012 found a 6" round concrete monument above a large field stone with
DATE an "X" chiseled on top of it.

left monument as found, lowered monument, removed monument (explain)

On 11-12-2012 placed a cast iron monument.
DATE

SKETCH OF REFERENCE TIES

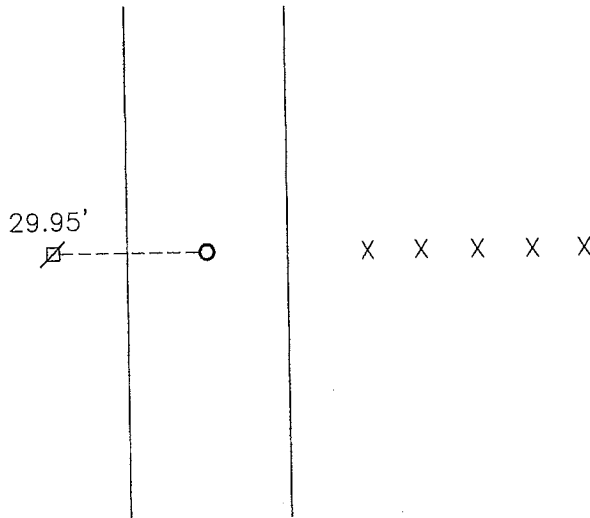


Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 160760.770
E: 521927.192

Nail and seal in utility pole West 29.95'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

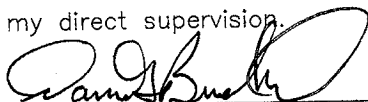
SIGNATURE

2/22/13
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of MAY 23 2013 A.D. 20 _____

County Recorder James V. Johnson
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, Wellman and Smoot did the original subdivision of the township.

On November 2, 1899, J. W. Woolstencroft found a stone at the corner.

On October 16, 1901, J. W. Woolstencroft found a stone at the corner.

On November 12, 2012, Bueltel-Moseng Land Surveying dug with backhoe and found a 6" round concrete monument above a large field stone with an "X" over it. We removed the concrete monument. We then set a $\frac{5}{8}$ " iron on the south side of the stone and a cast iron monument over it. The corner is in line with the fence to the east and in the center of the road.