

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 8, Township 108, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 10-31-2011 found a 3/8" iron.
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



X X X X X

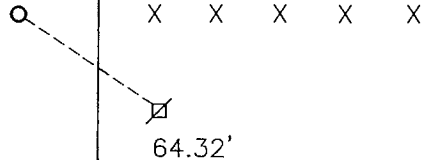

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 218951.728
E: 558605.170

Nail and bottle cap in utility pole SE 64.32'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David B. Smith 1/23/12
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of JAN 25 2012 A.D. 20____

County Recorder *James V. Johnson*
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L. Brockmann did the original subdivision of the township.

On June 19, 1899, a stone was located at the corner.

On March 21, 2000, a $\frac{3}{8}$ " iron was set at the corner.

On October 31, 2011, Bueltel-Moseng Land Surveying found a $\frac{3}{8}$ " iron at the corner in line with the fences to the east and west.