

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter _____ Corner of Section 11, Township 106, Range 41, 5th P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On June 15, 1995 placed a 1" iron pipe w/seal #11943 (SEE BACK)
DATE

SKETCH OF REFERENCE TIES

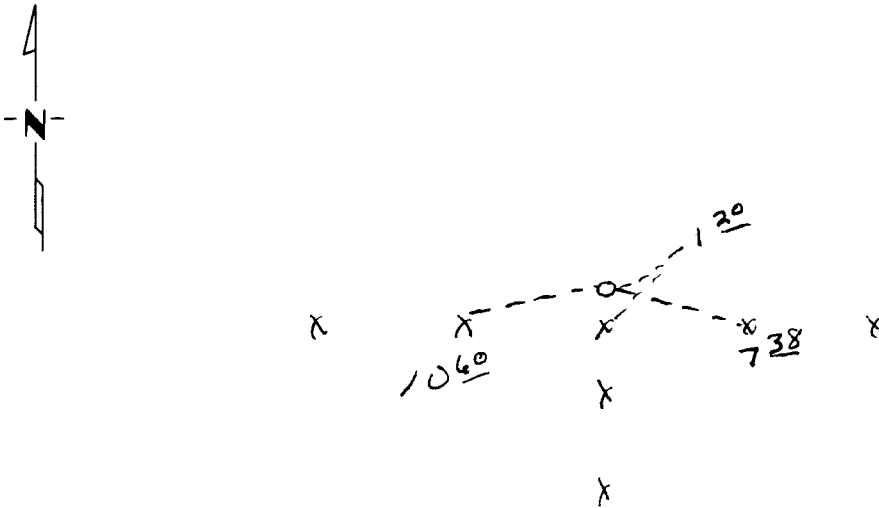

Nail & seal 1' up from bottom of wood post E 7.38'

Nail & seal 1' up from bottom of wood post W 10.60

Nail & seal 1' up from bottom of wood corner fence post S 1.20'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle C. Mooney 6-26-95
SIGNATURE DATE

Registration No. 11943

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

On June 15, 1995, we probed and dug by hand for corner and found nothing.

There are good fence lines to the East, West, & South. Set 1" iron pipe w/seal #11943 on the north side of the corner fence post.