

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 12, Township 108, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 08-29-2008 placed a SURVEY SPIKE WITH SEAL #43844  
DATE

### SKETCH OF REFERENCE TIES

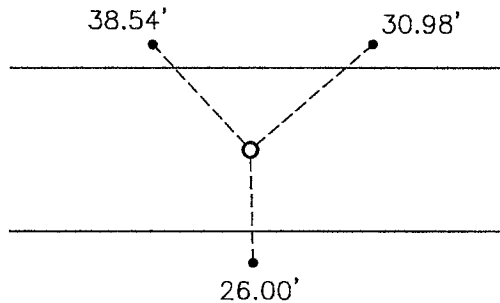

Minnesota State Plane Coordinate  
 System Murray County Datum  
 NAD83 (1996)  
 N: 211594.319  
 E: 545725.625

Steel pin in slope NW 38.54'  
 Steel pin in slope NE 30.98'  
 Steel pin in slope South 26.00'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*James V. Johnson* Jan 6, 2009  
SIGNATURE DATE

Registration No. 43844

- Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of \_\_\_\_\_

I hereby certify that this document was filed in the Co. Recorders office at \_\_\_\_\_ .M on the \_\_\_\_\_ day of \_\_\_\_\_ A.D. 20 \_\_\_\_\_

County Recorder *James V. Johnson*  
 By \_\_\_\_\_, Deputy

DOCUMENT NO. JUL 10 2009

## Statement of Evidence

In October, 1861, Lewis Brockman did the original subdivision of the township.

On May 11, 1899, a stone was found at the corner.

On January 11, 1971, the Murray County Highway Department found a field stone at the corner. They set a steel pin at the corner.

On August 29, 2008, Bueltel-Moseng Land Surveying found nothing at the corner. We set a survey spike with seal #43844 using the ties that the Murray County Highway Department recorded in 1971.