

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 16, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 5/7/2025 found a 5/8" iron with seal #23008

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

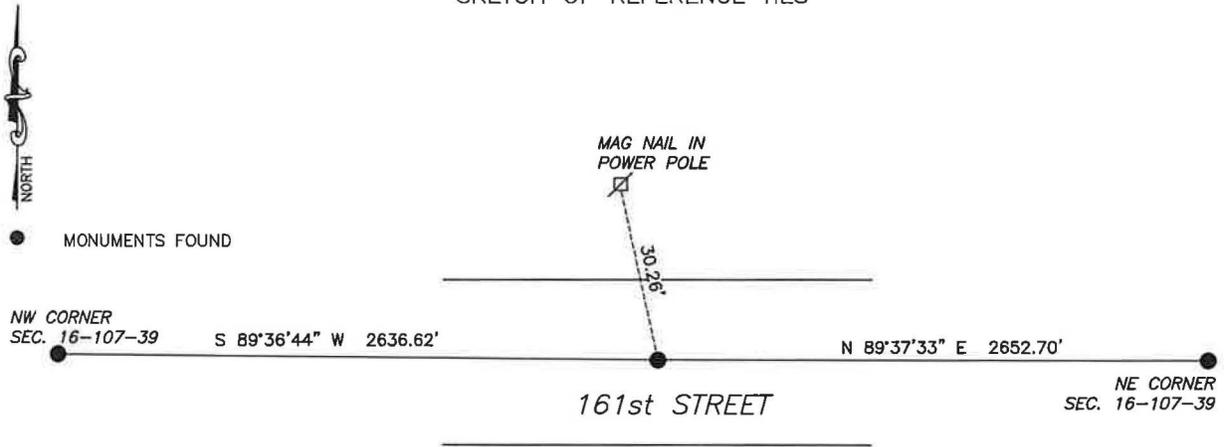


Murray County
 Coordinate System NAD83 (1996)
 N: 184624.500
 E: 561464.656

WGS 84
 LAT: 44°04'47.7860"
 LON: -95°31'58.0455"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel
 License No. 43844

8/8/2025
 DATE

AUG 12 2025



MURRAY COUNTY RECORDER

Statement of Evidence

NORTH QUARTER CORNER SECTION 16, T107N, R39W OF THE 5th P.M.

In July of 1861, J.W. Myers surveyed the township lines.

In September of 1861, L. Brockmann subdivided the township.

In December of 2019 Jesse Zieg shows a capped rebar found at the corner.

In December of 2020 Westwood Professional Services located a rebar with seal #23008 at the corner.

On May 7, 2025 Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron with seal #23008 at the corner. Accepted the monument as the corner.