

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 17, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

On 10/13/2025 found a 5/8" iron with seal #45874.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

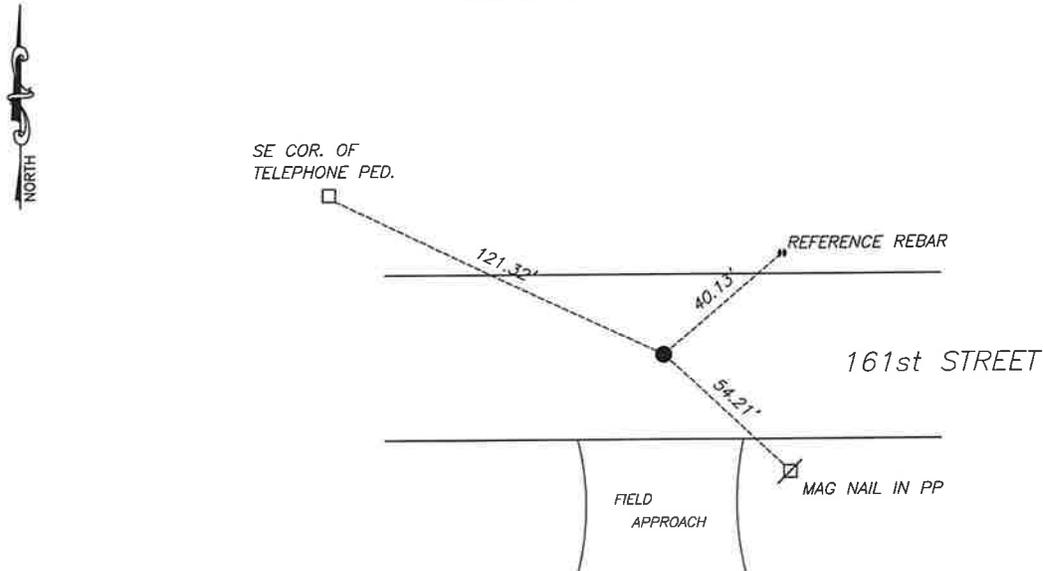


Murray County
Coordinate System NAD83 (1996)
N: 184619.125
E: 556174.553

WGS84
LAT: 44°04'47.8748"
LON: -95°33'10.5101"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



Daniel L. Bueltel
License No. 43844

1/16/2026
DATE

MURRAY COUNTY RECORDER



JAN 20 2026

Statement of Evidence

NORTH QUARTER CORNER SECTION 17, T107N, R39W OF THE 5th P.M.

In October of 1857, J.W. Myers surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated May 22, 1901 notes a stone and pits at the corner.

In December of 2020 Westwood Professional Services dug with a backhoe and found a 6"x8"x14" stone close to the road surface. They determined that the stone had been disturbed and considered the corner lost. They set a $\frac{1}{2}$ " iron with cap LS #45874 at single proportionate distance.

On October 13, 2025 Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " iron with seal #45874. Accepted the iron as the monument.