

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 20, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 8/26/2025 found a 3/4" PIPE.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 10/13/2025 placed a 5/8" iron with seal #43844 at the position of the 3/4" pipe.  
DATE

## SKETCH OF REFERENCE TIES

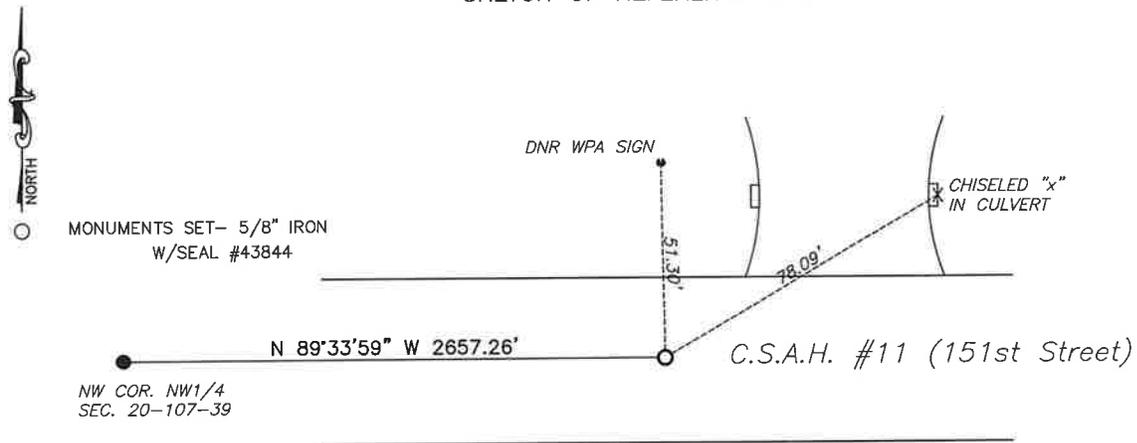

Murray County  
Coordinate System NAD83 (1996)


N: 179338.225  
E: 556208.165

WGS84

LAT: 44°03'55.7273"  
LON: -95°33'10.2374"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



Daniel L. Bueltel  
License No. 43844

1/16/2026  
DATE

MURRAY COUNTY RECORDER



JAN 20 2026

## Statement of Evidence

### NORTH QUARTER CORNER SECTION 20, T107N, R39W OF THE 5th P.M.

In October of 1857, J.W. Myers surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated May 22, 1901 notes a 6"x10"x20" limestone monument at the corner.

County records dated November 23, 1987 note a  $\frac{3}{4}$ " iron monument located at the corner.

On September 21, 2015 Zieske Land Surveying located an iron monument at the corner.

On August 27, 2020 Westwood Professional Services located a  $\frac{3}{4}$ " iron pipe located at the corner.

On August 26, 2025 Bueltel-Moseng Land Surveying found a  $\frac{3}{4}$ " pipe, removed and dug with backhoe for the limestone called for by J.W. Woolstencroft. Dug a large 6'x10' hole down to clay and found nothing. Accepted the position of the  $\frac{3}{4}$ " pipe.

Returned on October 13, 2025 and set a  $\frac{5}{8}$ " iron with seal #43844 at the position of the  $\frac{3}{4}$ " pipe.