

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 23, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/7/2025 found a 3/4" iron
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

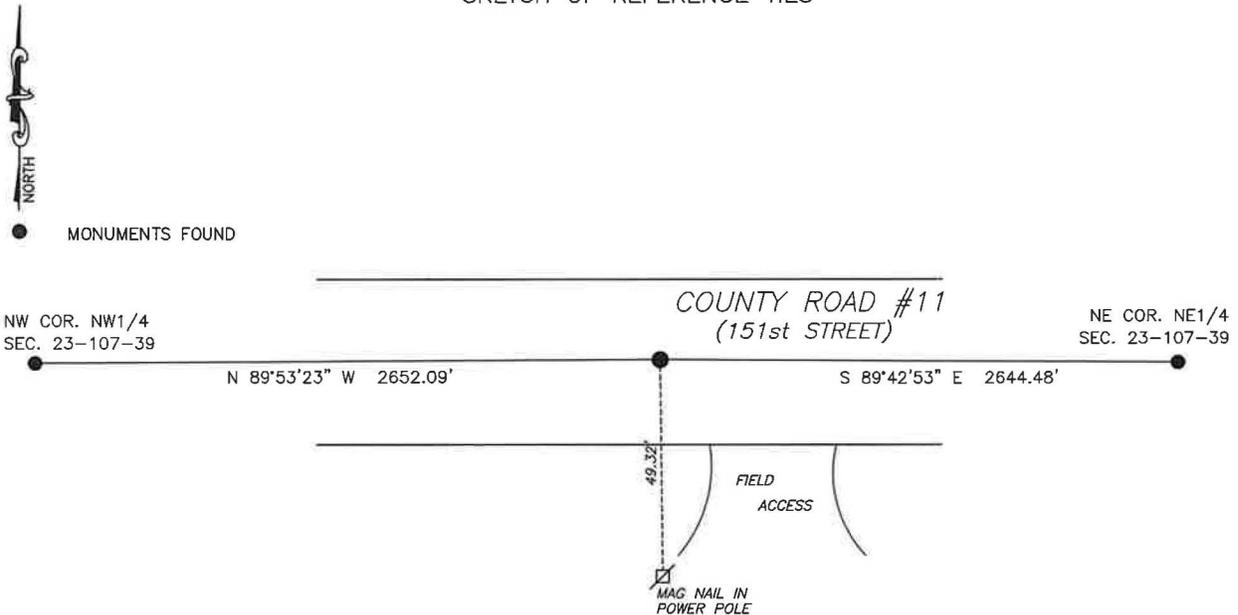

Murray County
 Coordinate System NAD83 (1996)
 N: 179378.727
 E: 572070.694

WGS 84
 LAT: 44°03'55.6636"
 LON: -95°29'33.0020"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel
 License No. 43844

8/8/2025
 DATE

AUG 12 2025



MURRAY COUNTY RECORDER

Statement of Evidence

NORTH QUARTER CORNER SECTION 23, T107N, R39 OF THE 5th P.M.

In July of 1861, J.W. Myers surveyed the township lines.

In September of 1861, L. Brockmann subdivided the township.

County records from 1963 note a spike located at the assumed location of the corner. They replaced the spike with a steel pin.

On August 27, 2020 Westwood Professional Services located a $\frac{3}{4}$ " iron at the corner.

On May 5, 2025 Bueltel-Moseng Land Surveying found a $\frac{3}{4}$ " iron at the corner, accepted the iron as the monument.