

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 26, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 5/7/2025 found a 5/8" iron with seal #23008.
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



● MONUMENTS FOUND

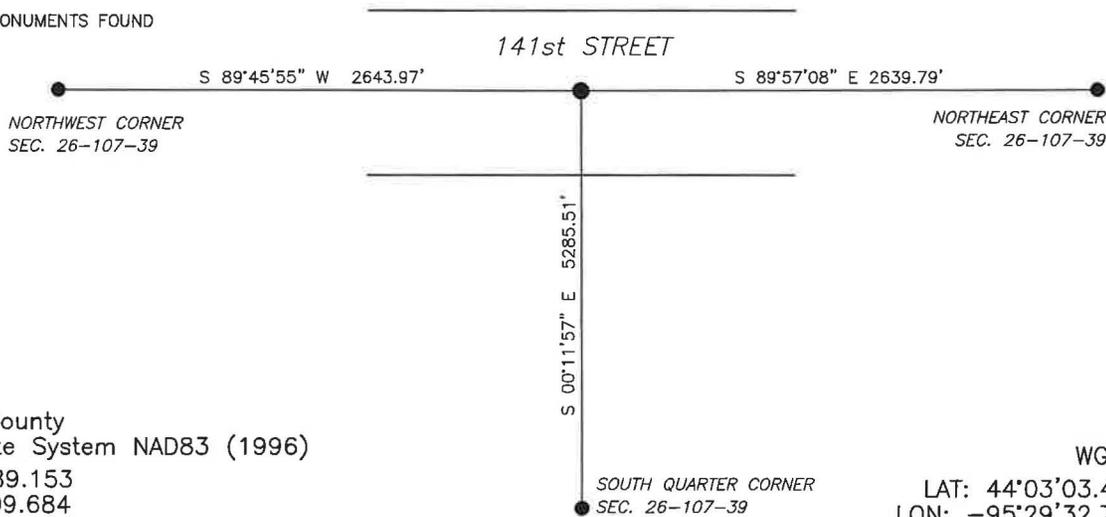

Murray County
 Coordinate System NAD83 (1996)
 N: 174089.153
 E: 572109.684

WGS 84
 LAT: 44°03'03.4301"
 LON: -95°29'32.7090"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel
 License No. 43844

8/8/2025
DATE

AUG 12 2025



MURRAY COUNTY RECORDER

Statement of Evidence

NORTH QUARTER CORNER SECTION 26, T107N, R39W OF THE 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft, dated October 27, 1909, notes a distance of 2640 feet from the northeast corner of the section.

On March 10, 2000 Perry Zieske, LS #23008, searched the area and found nothing he set a $\frac{5}{8}$ " iron with seal #23008 using distances from a 1907 survey of section 26.

On May 7, 2025 Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron with seal #23008 at the corner, accepted the monument as the corner.