

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 27, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/7/2025 found a 5/8" iron, probed and hit stone beneath.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

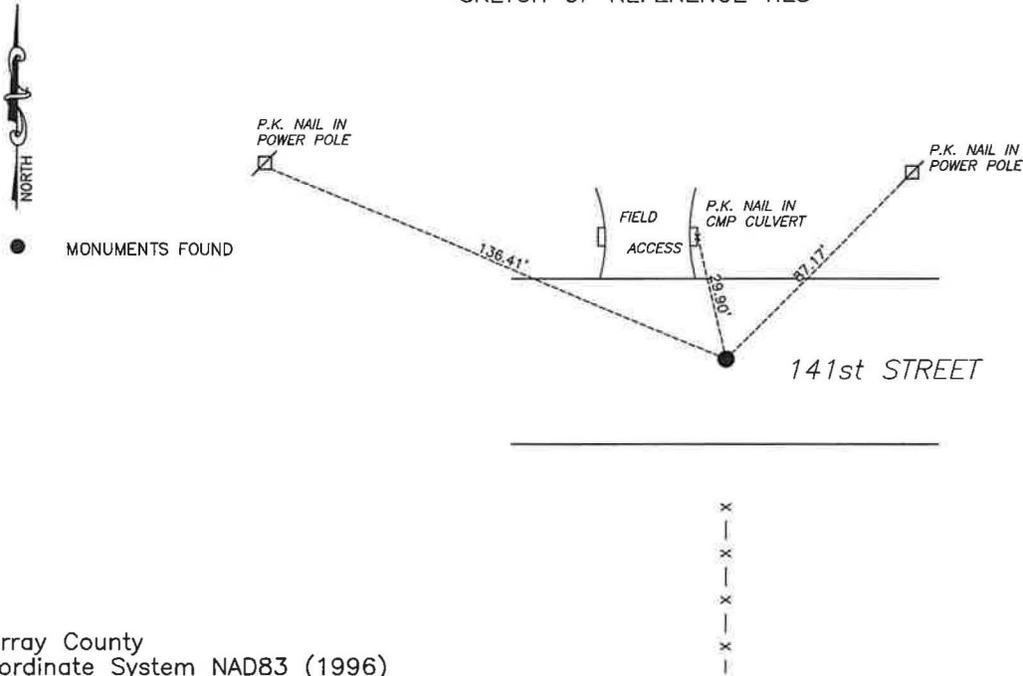

Murray County  
 Coordinate System NAD83 (1996)  
 N: 174068.184  
 E: 566818.542

WGS 84  
 LAT: 44°03'03.3905"  
 LON: -95°30'45.1532"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Bueltel* 8/8/2025  
DATE  
 Daniel L. Bueltel  
 License No. 43844

AUG 12 2025

*Karen Brown*

**MURRAY COUNTY RECORDER**

Statement of Evidence

**NORTH QUARTER CORNER SECTION 27, T107N, R39W OF THE 5th P.M.**

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

In April 1901, a survey by J.W. Woolstencroft notes a stone located at the corner 2.5' below the gravel surface.

County records from 1977 shows and iron pin at the corner.

County records dated Jun 12, 2012 show a  $\frac{1}{2}$ " iron pin found at the corner.

On August 27, 2020 Westwood Professional Services located a No. 5 rebar at the corner.

On May 7, 2025 Bueltel-Moseng Land Sureying located a  $\frac{5}{8}$ " iron at the location of the corner, probed and hit the stone below. Accepted the iron as the corner.