

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 27, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- ☒ On 5/11/2026 found a survey spike at the center of the intersection.
DATE
- ☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)
- ☒ On 7/7/2026 placed a 3" survey spike with seal #43844
DATE


SKETCH OF REFERENCE TIES

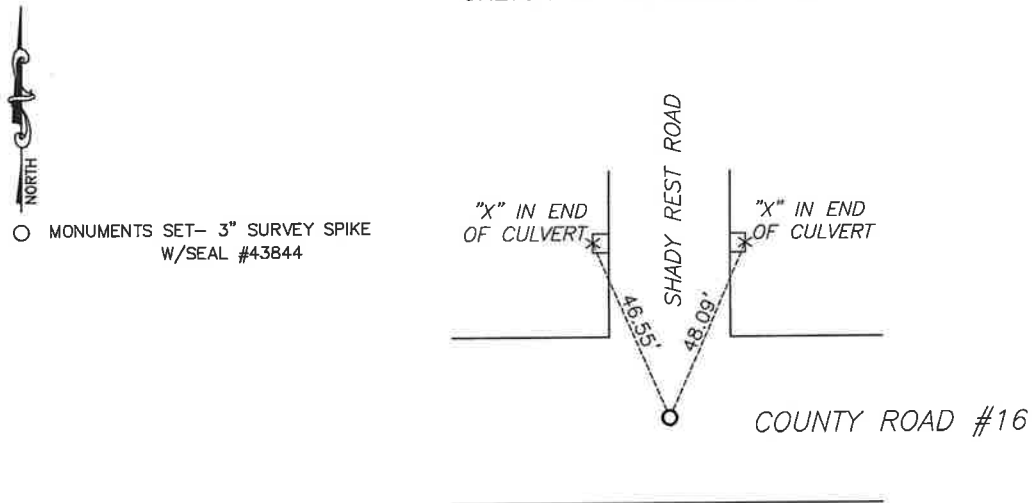

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 205769.610
E: 503334.873

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision




Daniel L. Bueltel
License No. 43844

7/30/2026
DATE

RECORDING INFORMATION

JUL 31 2026



MURRAY COUNTY RECORDER

Statement of Evidence

North Quarter Corner Section 27, T108N, R41W of the 5th P.M.

September, 1858 - W.J. Neely surveyed the North boundary of the township.

July, 1861 - J.W. Myers surveyed East, West, and South boundaries of the township.

September, 1861 - L.G.M. Fletcher subdivided the township.

Undated - old survey book notes a stone at the corner.

April 7, 1970 - County records note a field stone located at the corner and a $\frac{3}{4}$ " iron bolt was placed above the stone.

August 9, 1989 - Duane Bonnema, LS 14895, found a field stone 2 feet below the surface and placed a cast iron monument above the stone.

May 11, 2026 - Bueltel-Moseng Land Surveying searched the area and found a survey spike at the location of the corner.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 at the location of the found survey spike after the county overlay project.