

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 28, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 11/24/2025 placed a 5/8" iron midway and on line between section corners.  
DATE

SKETCH OF REFERENCE TIES

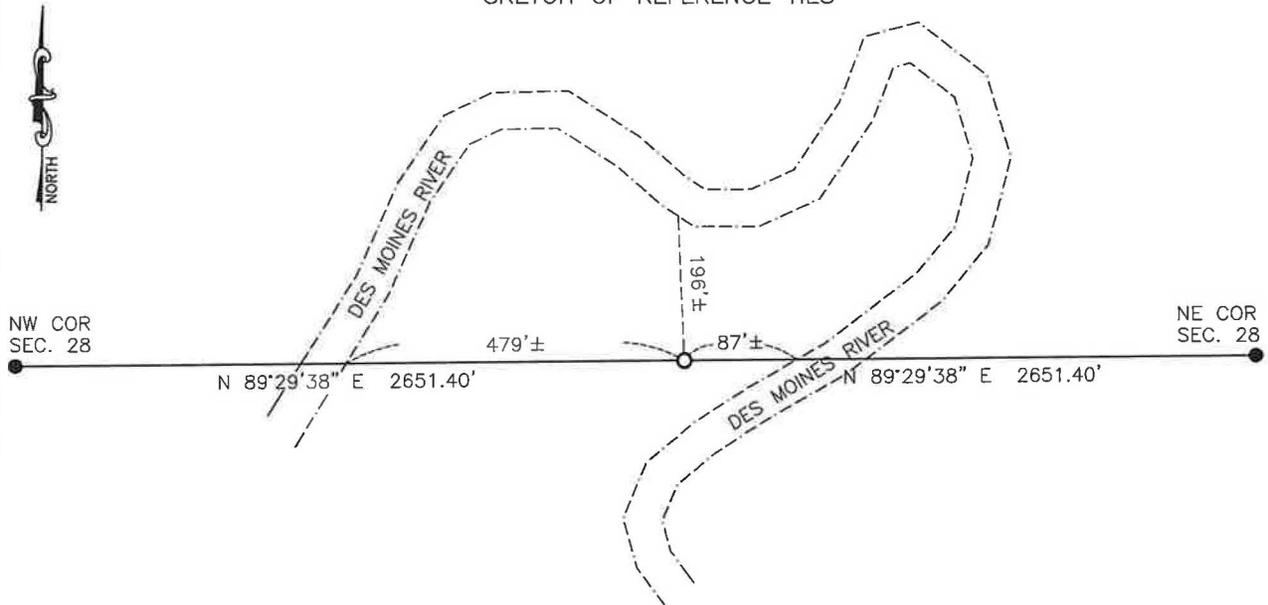


Murray County  
Coordinate System NAD83 (1996)  
N: 142374.695  
E: 561603.985

WGS84  
LAT: 43°57'50.5805"  
LON: -95°31'57.7797"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

  
Daniel L. Buettel  
License No. 43844

1/16/2026  
DATE

MURRAY COUNTY RECORDER



JAN 20 2026

Statement of Evidence

**NORTH QUARTER CORNER SECTION 28, T106N, R39W OF THE 5th P.M.**

In September 1858 W.J. Neely surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In August of 1861 Wellman & Smoot subdivided the township.

November 24, 2025, Bueltel-Moseng Land Surveying searched the area for corner and found no evidence of the corner. Place a 5/8" iron with seal 43844 midway and on line between section corners.