


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 28, Township 106N, Range 40W, 5th P.M.
STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On 08-31-90 found a field stone 30" down with a 1/2" pipe on top.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 08-31-90 placed a 1/4" pipe with seal on top of stone level with
DATE
road surface

SKETCH OF REFERENCE TIES

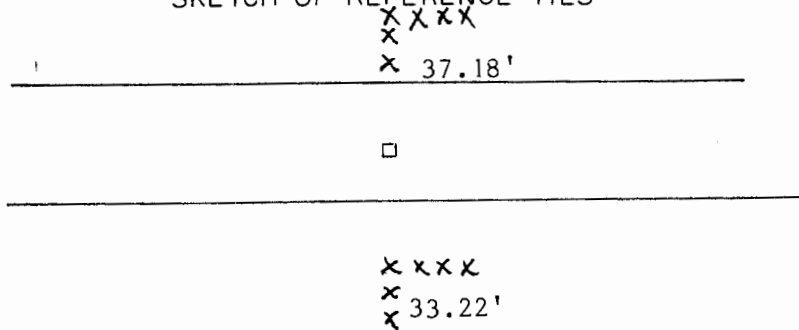

Nail and seal in CFP N 37.18'

Nail and seal in CFP S 33.22'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Luigi C. Moser Oct 31, 1990
SIGNATURE DATE

- Registration No. 11943
- Land Surveyor, Professional Engineer
 - County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M. on the _____ day of _____ A.D., 19 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

Original survey done in the 1850's by pit and mound.

On August 31; 1990 we found a bent over 1/2" pipe 30" long on top of a field stone we removed bent pipe and replaced it with a 1 1/4" pipe with seal and tied it out.