

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 28, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

☐ On _____ found a _____
DATE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7/7/2026 placed a 3" survey spike with seal #43844
DATE

SKETCH OF REFERENCE TIES

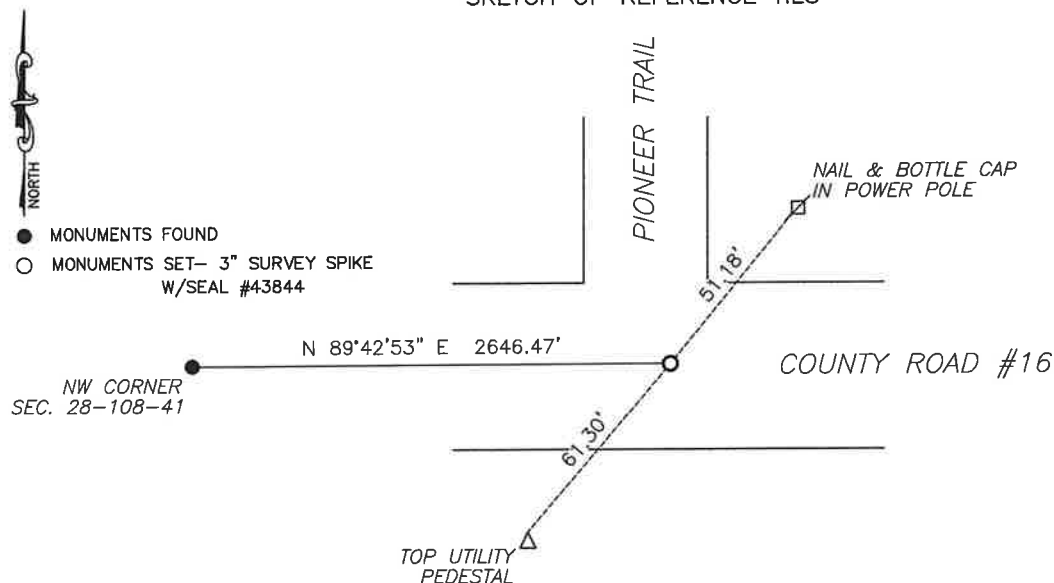

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 205769.180
E: 498016.657

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Buelte
License No. 43844

7/30/2006
DATE

RECORDING INFORMATION

JUL 31 2026

Karen Brown

MURRAY COUNTY RECORDER

Statement of Evidence

North Quarter Corner Section 28, T108N, R41W of the 5th P.M.

September, 1858 - W.J. Neely surveyed the North boundary of the township.

July, 1861 - J.W. Myers surveyed East, West, and South boundaries of the township.

September, 1861 - L.G.M. Fletcher subdivided the township.

April 7, 1970 - County survey records note a stone located at the corner.

April 4, 1972 - County records notes a concrete monument located at the corner.

October 3, 1997 - Zieske Land Surveying located a p.k. nail at the corner.

July 8, 2010 - Bueltel-Moseng Land Surveying found a p.k. nail at the corner and set a 3" survey spike with seal #43844 at the location of the p.k. nail.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 at the road surface after the county over lay project.