

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 29, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 2/4/2026 found a 5/8" iron
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



● MONUMENTS FOUND

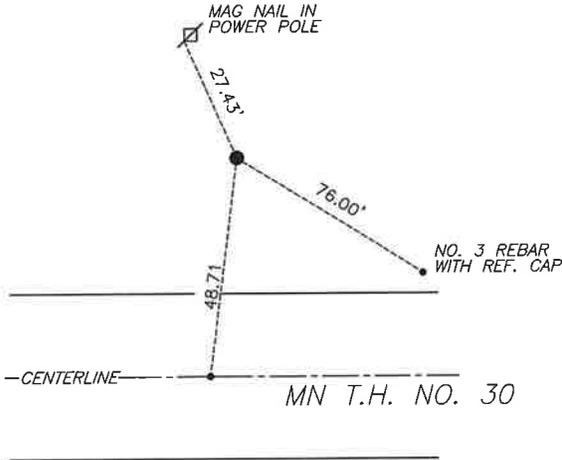

Murray County
Coordinate System NAD83 (1996)
N: 174054.362
E: 556221.710

WGS 84
LAT: 44°03'03.5510"
LON: -95°33'10.2396"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

2/5/2026
DATE

MURRAY COUNTY RECORDER

FEB 06 2026

Statement of Evidence

NORTH QUARTER CORNER SECTION 29, T107N, R39W OF THE 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

Undated State Highway 30 plans (map file 72-9-002.tif) show the section corner at 49.4ft north of P.O.S. T. 663+45.9.

February 2008, A survey in Section 20 by Perry Zieske shows a found iron monument at the corner.

August 27, 2020, Westwood Professional Services searched and found No. 5 rebar with broken cap. Location fits 2008 Zieske Survey and offset from Highway plans. Accepted found monument and set references.

February 4, 2026, Bueltel-Moseng Land Sureying located a $\frac{5}{8}$ " iron at the location of the corner. Ties matched Westwood Professionals.