

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 31, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 7/10/2025 found a concrete monument with a capped iron on the west side of
DATE the monument.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

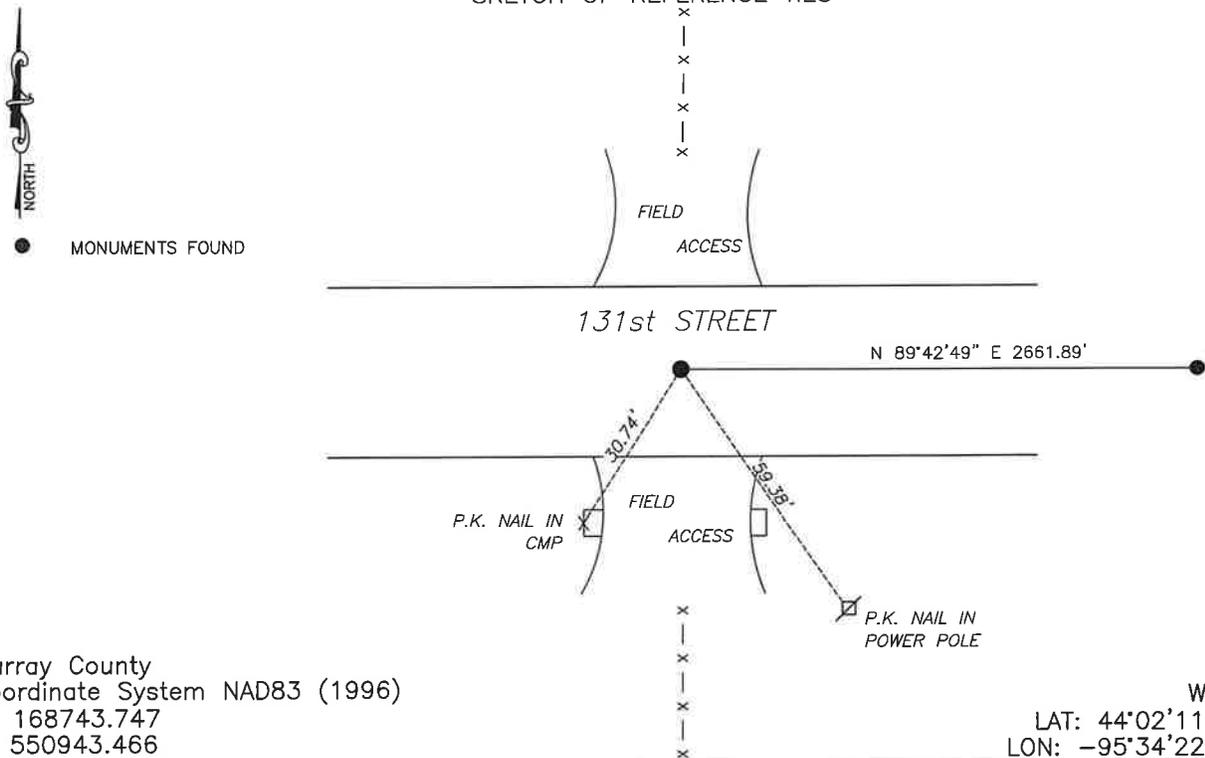

Murray County
 Coordinate System NAD83 (1996)
 N: 168743.747
 E: 550943.466

WGS 84
 LAT: 44°02'11.2396"
 LON: -95°34'22.6774"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
 License No. 43844

10/21/2025
 DATE

OCT 24 2025

MURRAY COUNTY RECORDER

Statement of Evidence

NORTH QUARTER CORNER SECTION 31, T107N, R39W OF THE 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

An undated survey by F.H. March notes a concrete stone for the monument.

On May 15, 1975 Del Thraen located a concrete monument at grade at the corner.

On December 16, 2020 Westwood Professional Services located a 6"x6" concrete monument at the corner and placed a $\frac{1}{2}$ " iron with cap L.S. 45874 on the west side of the monument.

On July 10, 2025 BuelteI-Moseng Land Suveying located a 6"x6" concrete monument 0.3 feet below the road surface with a $\frac{1}{2}$ " capped iron #45874 on the west side. Accepted the monument as the corner.