

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 32, Township 106, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY



At the corner location shown on the sketch:

On 10-21-2005 found a 1/2" IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

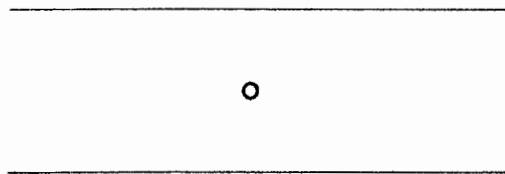

Minnesota State Plane Coordinate
 System South Zone
 NAD83 (1996)

N: 680267.228
 E: 2120709.351

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James V. Johnson 2/3/06
SIGNATURE DATE

Registration No. 43844

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of James V. Johnson D. 20 _____
 County Recorder MAR 14 2006

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In September, 1866 J. W. Bishop did the original survey.

(No Date) A stone was later found at the corner.

(No Date) The Murray County Highway Department found a stone 1.8' feet down and placed a $\frac{1}{2}$ " x 1'3" steel pin over the stone.

On October 21, 2005 Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " iron 3" down.