

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 34, Township 106, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 10/9/13 found a 10" stone
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/9/13 placed a 5/8" iron w/seal #43844
DATE

SKETCH OF REFERENCE TIES

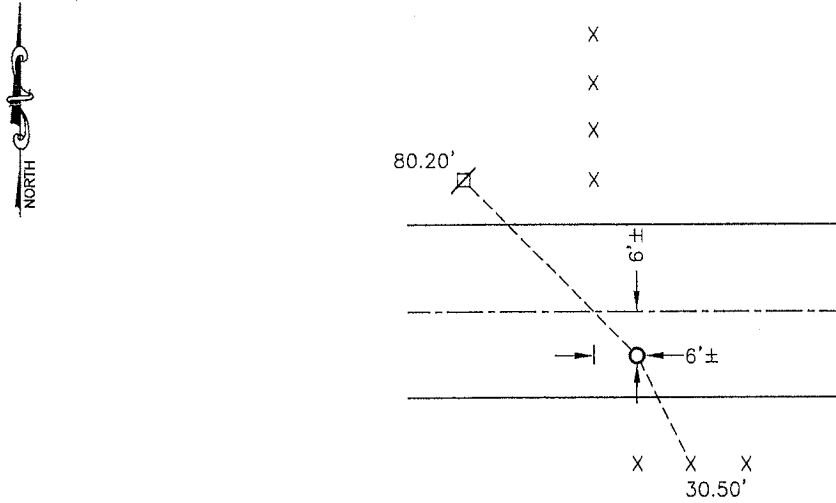

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

N: 137023.300
E: 503474.166

Nail and survey marker in utility pole NW 80.20'

Nail and survey marker in center post of 3 wood posts SE 30.50'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision

[Signature]
SIGNATURE

2/5/14
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of **FEB 5 2014** A.D. 20____

County Recorder James V. Johnson
By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, L.G.M. Fletcher did the original subdivision of the township.

On April 12, 1898, J.W. Woolstencroft, Murray County Surveyor, found a stone and pit at the corner.

On October 9, 2013, Bueltel-Moseng Land Surveying dug with a backhoe and found a 10" stone 6" below the road surface. It was 29'± north of fence to the south as shown on old survey. We set a 5/8" iron with seal #43844 above stone. It is 6'± east of fence to the north and 6'± south of centerline of the road.