

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 34, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On July 17, 2025 found a 10"x12" pointed stone down 3.5'±.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On July 30, 2025 placed a 5/8" iron with seal #43844 over top of the stone.  
DATE

## SKETCH OF REFERENCE TIES

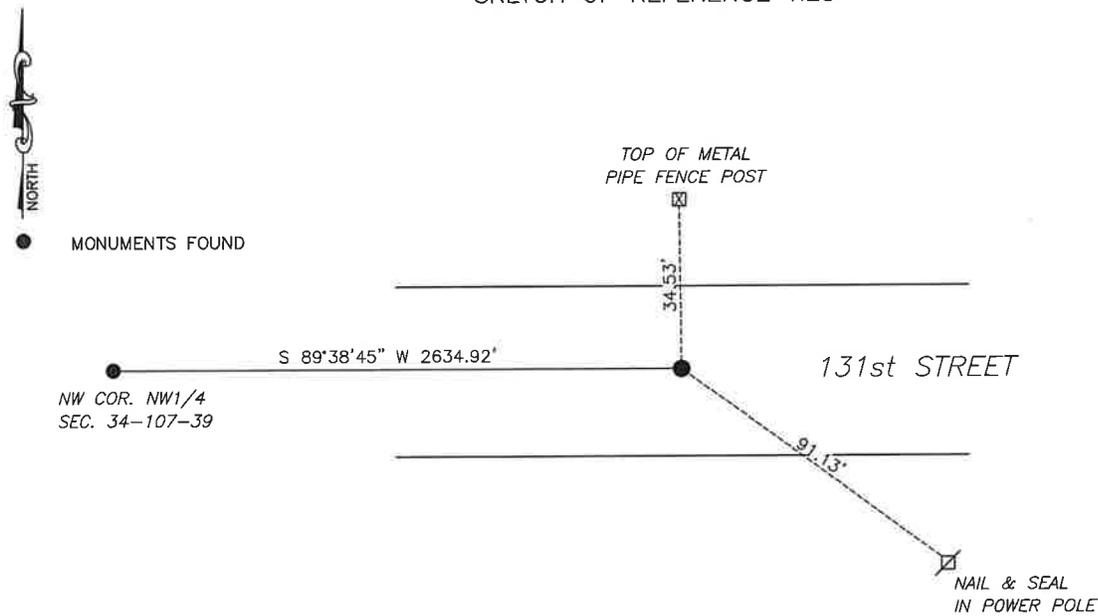

Murray County  
 Coordinate System NAD83 (1996)  
 N: 168775.986  
 E: 566854.021

WGS84  
 LAT: 44°02'11.1311"  
 LON: -95°30'44.8909"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Bueltel* 10/21/2025  
DATE  
 Daniel L. Bueltel  
 License No. 43844

OCT 24 2025

*Karen Brown*  
 MURRAY COUNTY RECORDER

## Statement of Evidence

North Quarter Corner Section 34, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

An undated survey by F.A. March notes a concrete monument at the corner.

County records dated April 27, 1981 show a concrete monument located at the corner and an 8" rebar placed above the monument.

Tie: Top pipe fence post North 34.35'

Tie: Nail & bottle cap in power pole SE 81.84'

County records dated May 2012 notes that Murray County was not able to locate the rebar.

On July 17, 2025 Bueltel-Moseng Land Surveying dug with a backhoe in the center of the road and 34.35 feet south of recorded existing pipe fence post, found a 10"x12" pointed field stone. The field stone fit the pipe fence post tie, we accepted the field stone as the monument.

On July 30, 2025 we set a  $\frac{5}{8}$ " iron with seal #43844 over top of the stone monument.