

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 4, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 7/10/2025 found a 5/8" iron with seal 23008 (see statement of evidence)
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

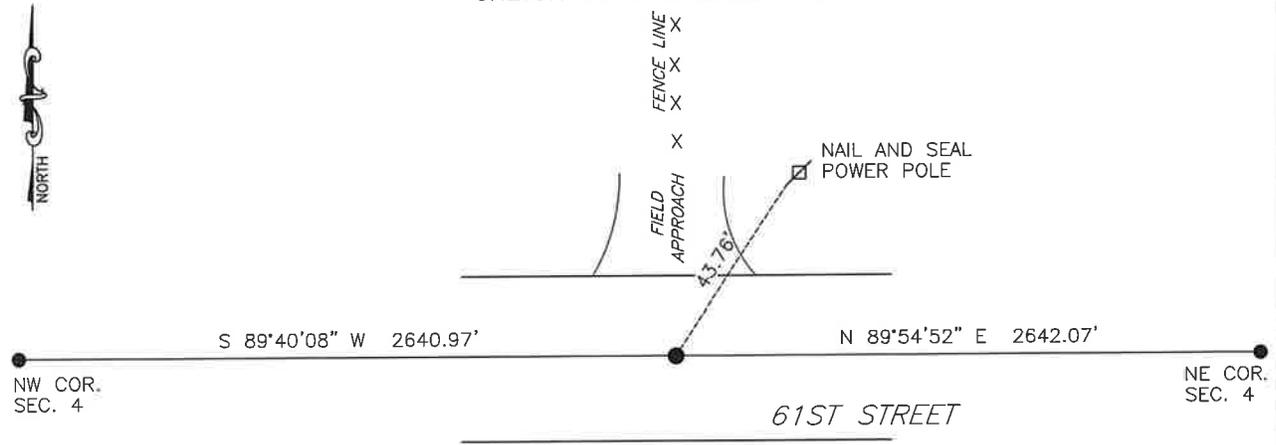

Murray County
 Coordinate System NAD83 (1996)
 N: 131765.099
 E: 561672.345

WGS84
 LAT: 43°56'05.8114"
 LON: -95°31'57.2571"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel 1/16/2026
DATE
 Daniel L. Bueltel
 License No. 43844

MURRAY COUNTY RECORDER
Karen Brown
 JAN 20 2026

Statement of Evidence

NORTH QUARTER CORNER SECTION 4, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

County records dated October 1, 1992 notes they dug a 6'x8'x3.5' deep hole and found nothing.

A corner certificate by Perry Zieske, L.S. 23008, dated May 13, 2004, shows that he found a stone down 2.5' and placed a $\frac{5}{8}$ " iron with seal #23008 over top of the stone.

July 10, 2025, Bueltel-Moseng Land Surveying found 5/8" iron with seal 23008. Probed and hit stone. Accepted 5/8" iron with seal 23008.