

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 5, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/22/2025 found a large pointed field stone and placed a 5/8" iron with
DATE seal 43844 along the north side of stone.
- left monument as found, lowered monument, removed monument (explain)
- On 6/10/2025 placed a 5/8" iron with seal 43844 over stone.
DATE

SKETCH OF REFERENCE TIES

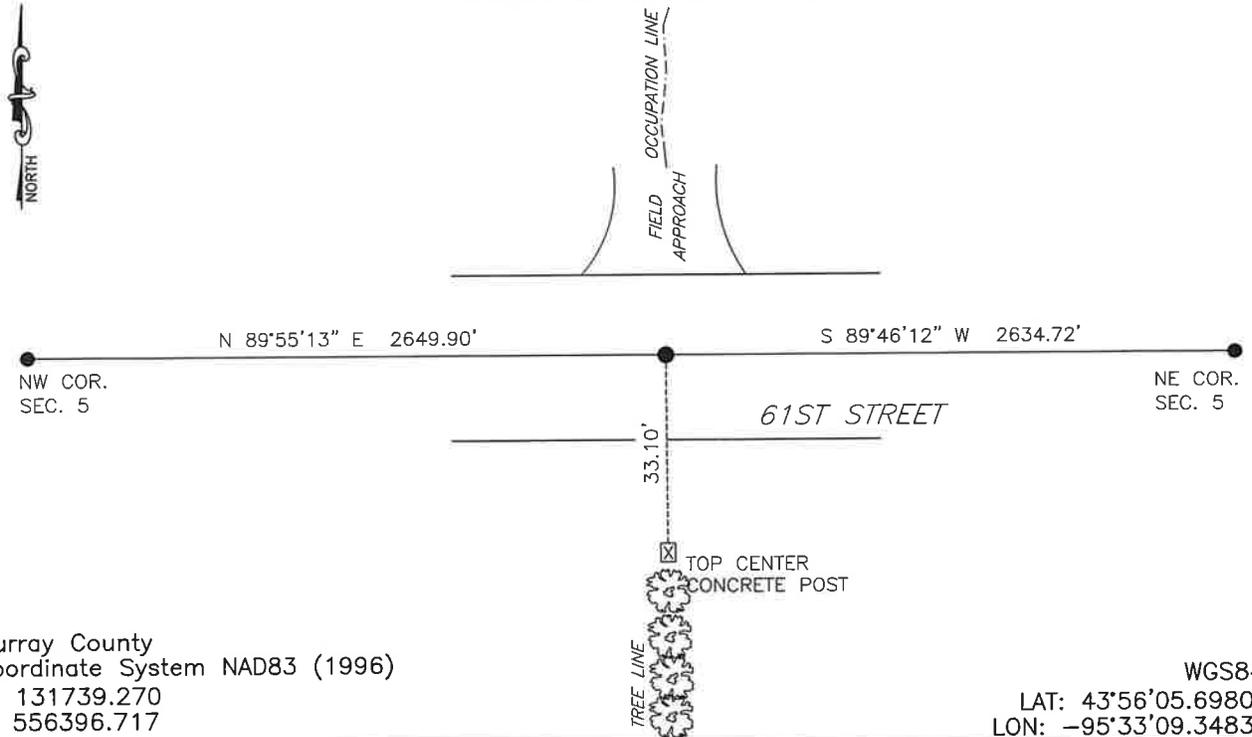


Murray County
 Coordinate System NAD83 (1996)
 N: 131739.270
 E: 556396.717

WGS84
 LAT: 43°56'05.6980"
 LON: -95°33'09.3483"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel 1/16/2026
DATE
 License No. 43844

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

NORTH QUARTER CORNER SECTION 5, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

A survey dated August 11, 1926 shows distances to corner from northwest and northeast corner. Does not note what was found or set. 2644.5' to NW corner and 2640.5' to NE corner.

May 22, 2025, Bueltel-Moseng Land Surveying dug with backhoe in line with tree line to the south and occupation line to the north. Found a large pointed field stone. Placed a 5/8" iron with seal 43844 along the north side of stone. Returned on June 10, 2025 and set a 5/8" iron with seal 43884 above the found stone.