

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTH QUARTER Corner of Section 6, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/22/2025 found a a large field stone. Placed a 5/8" iron with seal 43844
DATE
 along the north side of stone.
- left monument as found, lowered monument, removed monument (explain)
- On 6/10/2025 placed a 5/8" iron with seal 43844 over stone.
DATE

SKETCH OF REFERENCE TIES

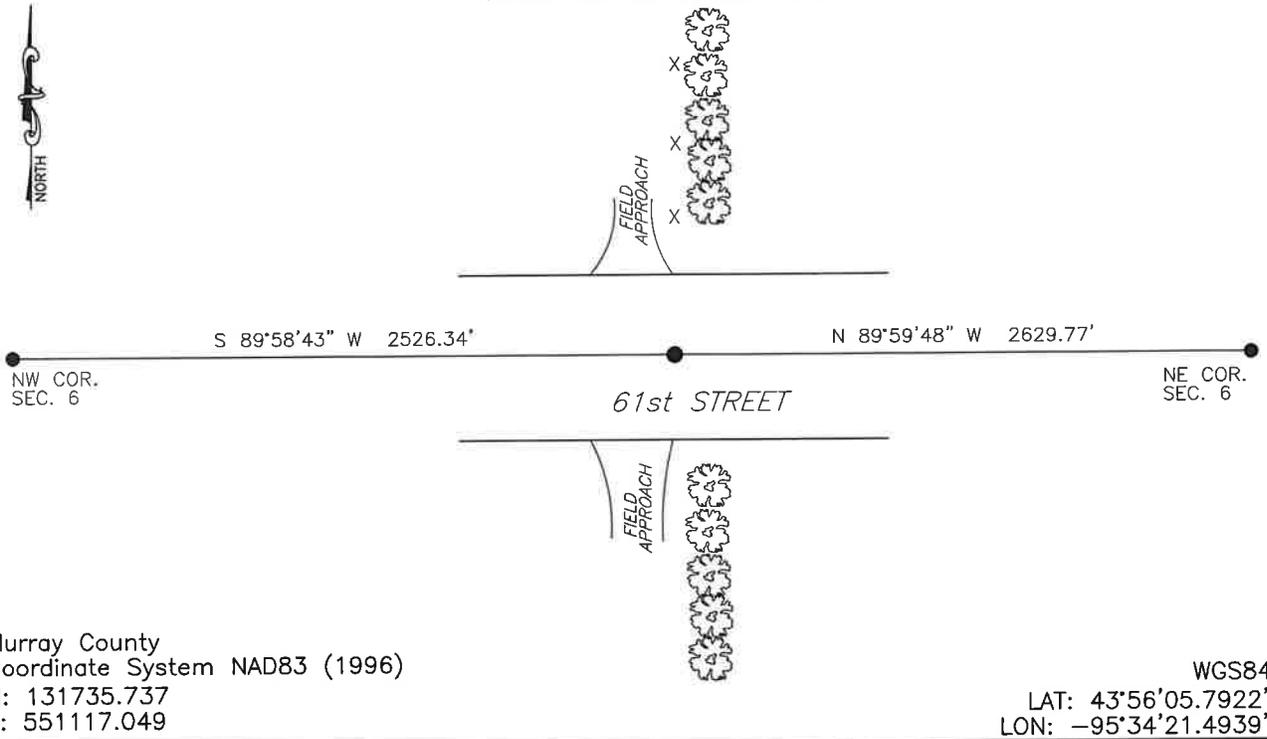


Murray County
 Coordinate System NAD83 (1996)
 N: 131735.737
 E: 551117.049

WGS84
 LAT: 43°56'05.7922"
 LON: -95°34'21.4939"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



Daniel L. Bueltel
 License No. 43844

1/16/2026
DATE

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

NORTH QUARTER CORNER SECTION 6, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township..

October 1926, county records show a survey of Sec. 31-106-39 (by unknown person). Survey only shows distances to the southwest and southeast corners of Section 31-106-39. 2524' to southwest corner and 2630' to southeast corner.

County records dated May 8, 2018 notes Zieske Land Surveying found an iron stake at the corner.

May 22, 2025, Bueltel-Moseng Land Surveying, found a capped iron (LS 16093 Bell). Removed and dug with backhoe. Found a large field stone. Placed a 5/8" iron with seal 43844 along the north side of stone. Returned on June 10, 2025 and placed a 5/8" iron with seal 43844 over stone.