

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 9, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

☐ On _____ found a _____
DATE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On July 7, 2026 placed a 3" survey spike with seal #43844
DATE

SKETCH OF REFERENCE TIES

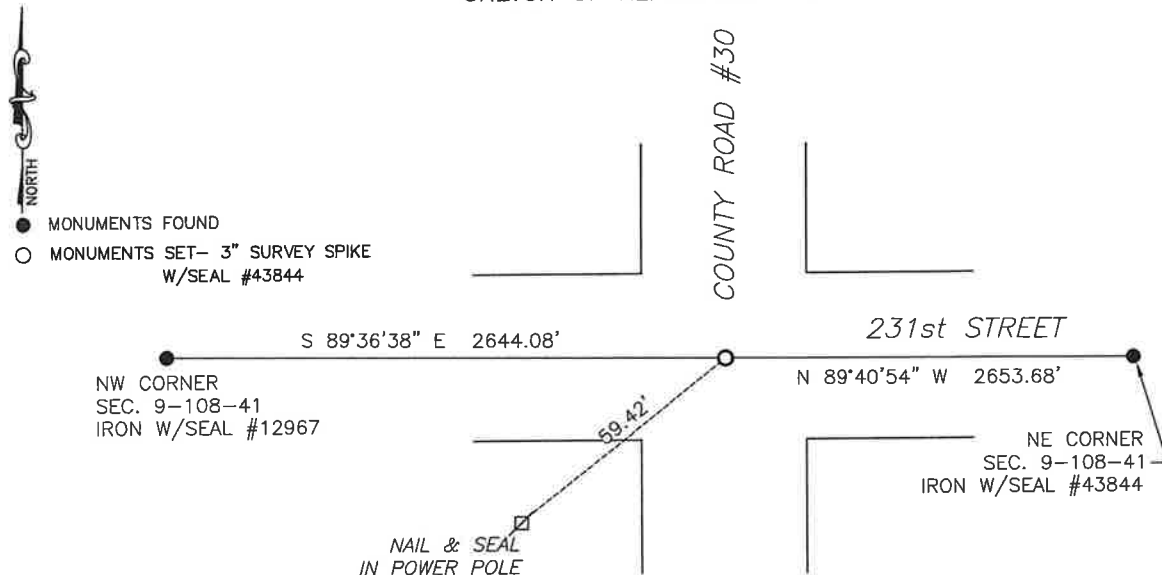

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 221591.026
E: 498034.858

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

7/30/2026
DATE

RECORDING INFORMATION

JUL 31 2026

MURRAY COUNTY RECORDER

Statement of Evidence

North Quarter Corner Section 9, T108N, R41W of the 5th P.M.

September, 1858 - W.J. Neely surveyed the North boundary of the township.

July, 1861 - J.W. Myers surveyed East, West, and South boundaries of the township.

September, 1861 - L.G.M. Fletcher subdivided the township.

February 6, 1934 - County records note a concrete stone found at the corner.

September 30, 1974 - County records show a concrete monument found at the corner and a steel pin was placed above the monument.

May 17, 2021 - Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " iron pin at the corner.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 at the location of the previously found $\frac{1}{2}$ " iron after the county overlay project.