

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 1, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 4/3/2025 found a 3/4" rebar
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE


SKETCH OF REFERENCE TIES

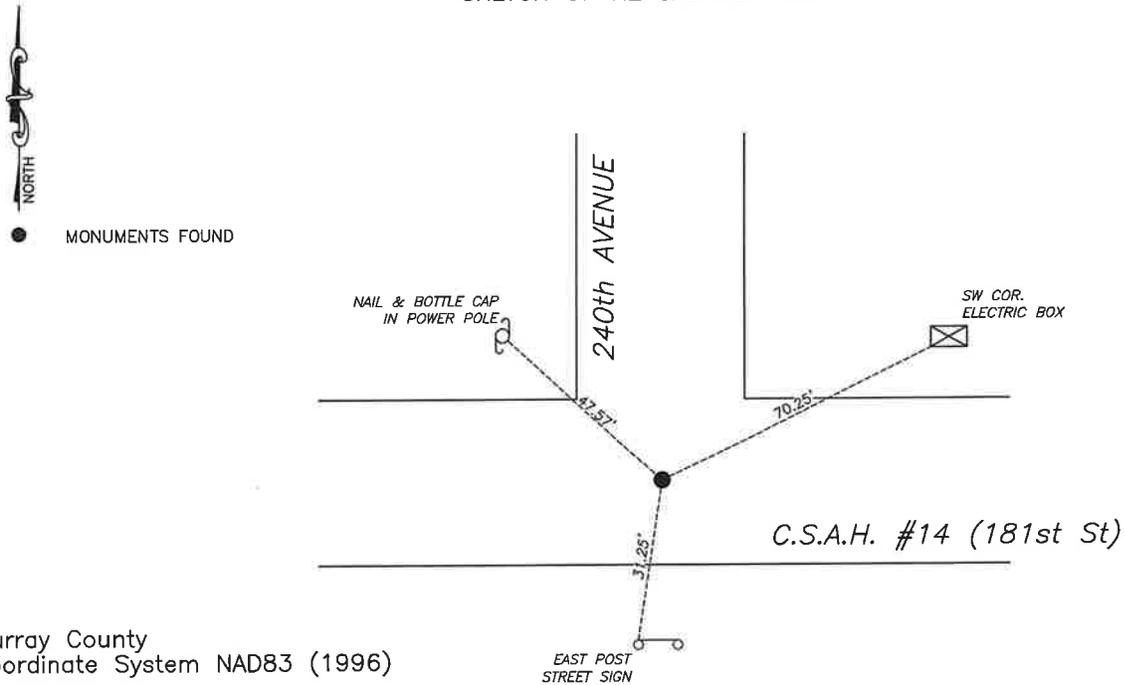

Murray County
 Coordinate System NAD83 (1996)
 N: 195143.539
 E: 548372.287

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


 Daniel L. Bueltel
 License No. 43844
 DATE 2/4/2026

MURRAY COUNTY RECORDER

Karen Brown

FEB 06 2026

Statement of Evidence

NORTHEAST CORNER SECTION 1, T107N, R40W OF THE 5th P.M.

In 1861 J.W. Myers surveyed the original township lines.

September 1861, L. Brockmann did the original township subdivision.

An Undated survey record for section 1 shows a concrete stone at the corner.

July 21, 1989 Highway Department records show they located a field stone and wooden hub with concrete monument above placed a $\frac{3}{4}$ " rebar.

On August 27, 2013 Highway Department records show that they located a $\frac{3}{4}$ " rebar.

In September of 2020 Westwood Professional Services found a $\frac{3}{4}$ " rebar.

On April 3, 2025 Bueltel-Moseng Land Surveying found a $\frac{3}{4}$ " rebar at the corner. Probed along side and hit the stone beneath. Accepted the iron as the corner.