

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 105 N, Range 41 W, 5 TH P.M.



STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 06/23/2017 found a IRON PIN NEAR CENTER LINE ROADS NORTH-SOUTH-EAST-WEST.
DATE

left monument as found, lowered monument removed monument (explain)

On _____ place a _____
DATE

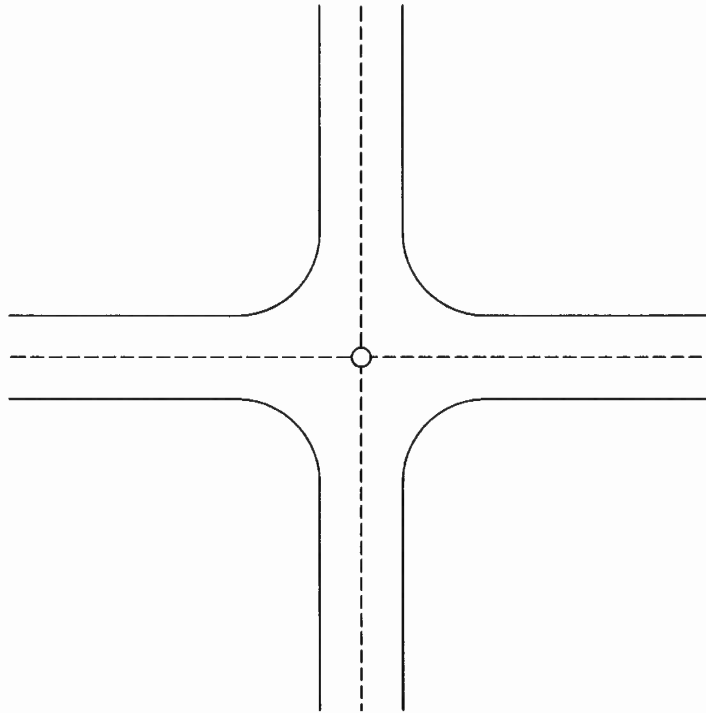

MURRAY COUNTY
COORDINATE
(2011 ADJUSTMENT)

N:126468.346
E:506088.189

Statement of evidence and reference ties relative to the corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SIGNATURE

8-24-17
DATE

License No. 49020

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co Recorders office at _____
.M. on the _____ day of _____ A.D. 20

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1861 – Corner established during survey of subdivision of township.

1957 – MNDNR assumed position.

1970 – MNDNR reestablished from previous measurements.

2017 – Jibben Surveying found an iron pin near the intersection of road center lines north-south-east-west. Held pin as corner.

SECTION 2
TOWNSHIP 105 NORTH, RANGE 41 WEST

