

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 12, Township 107, Range 40, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

On 7/30/2025 found a 3/4" rebar with an aluminum cap stamped  
DATE "DNR SURVEY MARKER".


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES



● MONUMENTS FOUND

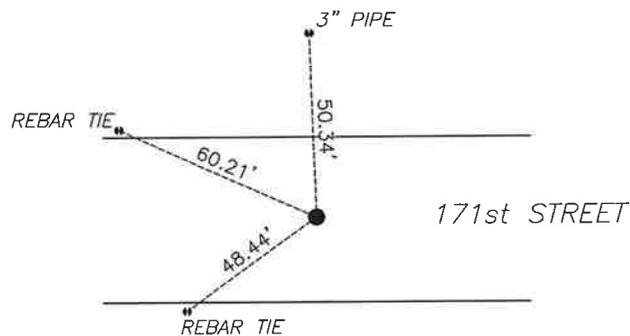

Murray County  
Coordinate System NAD83 (1996)  
N: 189852.824  
E: 548367.411

WGS84  
LAT: 44°05'39.7412"  
LON: -95°34'57.2934"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel  
License No. 43844

1/16/2026  
DATE

MURRAY COUNTY RECORDER

*Karen Brown*

JAN 20 2026

## Statement of Evidence

Northeast corner Section 12, T107N, R40W of the 5th P.M.

In 1861 J.W. Myers surveyed the original township lines.

September 1861, L. Brockmann did the original township subdivision.

A corner certificate by Bruce W. Shepperd, L.S. 17003, notes he found a 2.5"x24" charred wood stake at the corner and set a  $\frac{3}{4}$ " rebar with an aluminum cap stamped "DNR SURVEY MARKER" above the stake.

In September 2020 Westwood Professional Services found a  $\frac{3}{4}$ " rebar with DNR cap.

On July 30, 2025 Bueltel-Moseng Land Surveying found a  $\frac{3}{4}$ " rebar with an aluminum cap stamped "DNR SURVEY MARKER" at the corner. Accepted the capped rebar as the corner.