

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 13, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

☒ On 7/23/2024 found a Large flat top rock with a wooden stake next to it.
DATE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 1/29/2025 placed a 5/8" iron with seal #43844 over top of the stone
DATE

SKETCH OF REFERENCE TIES

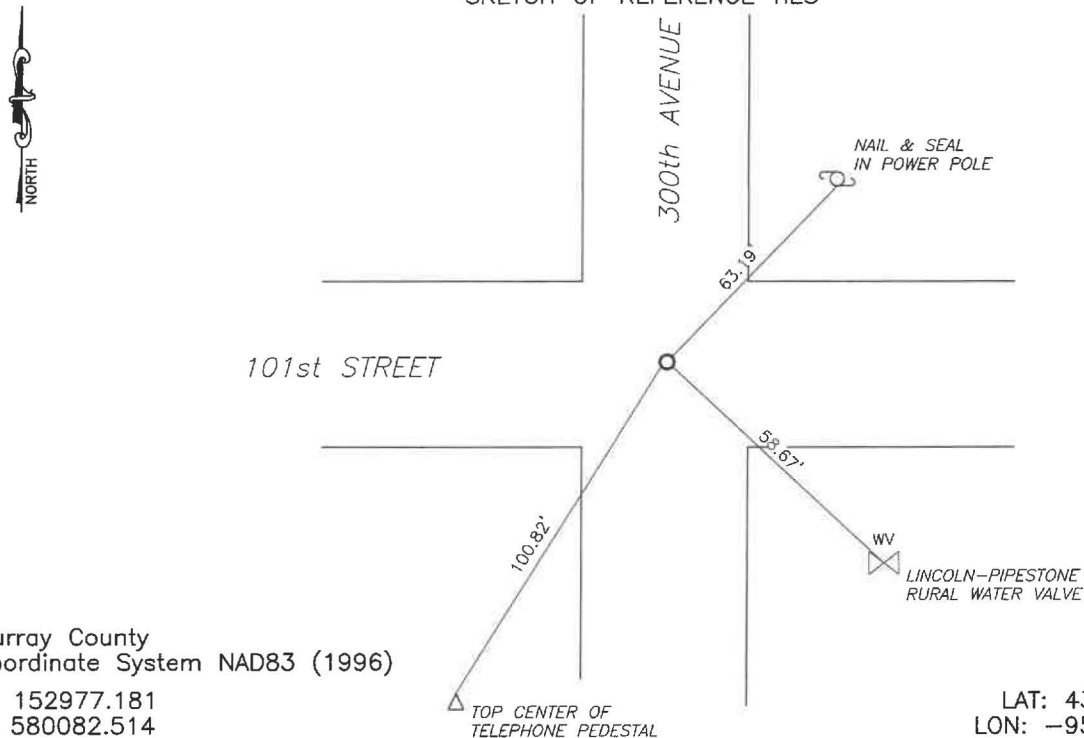

Murray County
Coordinate System NAD83 (1996)

N: 152977.181
E: 580082.514

WGS84
LAT: 43°59'34.6811"
LON: -95°27'44.6170"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Buettel
License No. 43844

3/12/2025
DATE

MAR 13 2025

Karen Brum
MURRAY COUNTY RECORDER

Statement of Evidence

NORTHEAST CORNER SECTION 13, T106N, R39W OF THE 5TH P.M.

In September 1858, W.J. Neely surveyed the east township line.

In July of 1861, J.W. Myers surveyed the north, south, and west township lines.

In August of 1861, Wellman & Smoot subdivided the township.

In November of 1914, J.W. Woolstencroft notes a Government Corner at the corner location.

On July 17, 1973, county records show a stone found at the corner and a steel pin placed above the stone.

October 1997, Zieske Land Surveying found iron stake down 10".

On June 28, 2024 Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron in the center of the intersection, we probed beside the iron and hit nothing.

On July 23, 2024 we dug with a backhoe at the location of the iron and found a large pointed field stone, begun to place a $\frac{5}{8}$ " iron along the south side of the stone and hit another stone underneath. Continued digging and found a 20" round flat stone with a wooden stake on the side of the stone. Accepted the flat stone as the corner and placed a $\frac{5}{8}$ " iron rebar on the south side of the stone for locating purposes.

Returned on January 29, 2025 and placed a $\frac{5}{8}$ " iron with seal #43844 over top of the flat stone.