

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 18, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 5/7/2025 found a BENT 3/4" IRON WITH OUT A CAP.
DATE

left monument as found, lowered monument, removed monument (explain)

On 8/19/2025 placed a 5/8" IRON WITH SEAL #43844 AT THE POSITION OF THE
DATE
BENT IRON.

SKETCH OF REFERENCE TIES

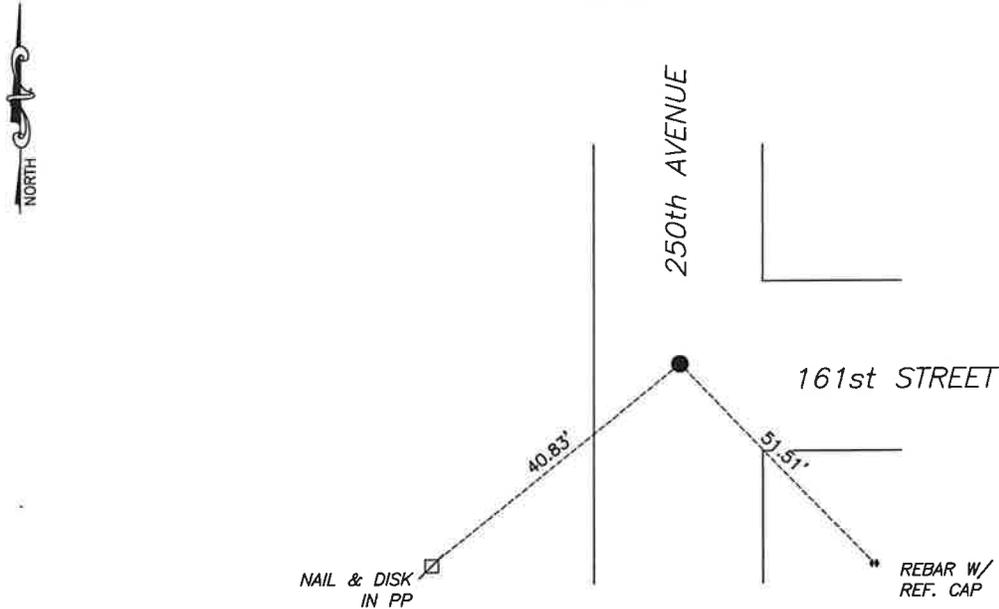

Murray County
Coordinate System NAD83 (1996)

N: 184631.654
E: 553521.038

WGS 84
LAT: 44°04'48.0648"
LON: -95°33'46.8579"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

10/21/2025
DATE

OCT 24 2025

MURRAY COUNTY RECORDER

Statement of Evidence

NORTHEAST CORNER SECTION 18, T107N, R39W OF THE 5th P.M.

In July of 1861, J.W. Myers surveyed the township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated May 22, 1901 notes a stake, pile of stones, and mound at the corner.

In October of 1991 Bruce Shepperd, LS #17003, with the DNR Bureau of Engineering dug a large hole with a backhoe and found no evidence of the monument. He set a $\frac{3}{4}$ " iron with an aluminum cap stamped "DNR SURVEY MARKER" in the center line of the north-south road and in line with the fence to the west.

On August 27, 2020 Westwood Profesional Services found a No. 6 rebar without a cap.

On May 7, 2025 Bueltel-Moseng Land Surveying found a bent $\frac{3}{4}$ " iron with out a seal, accepted the monument as the corner.

On August 19, 2025 replaced the bent iron with a $\frac{5}{8}$ " iron with seal #43844.