

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 8/19/2025 found a P.K. nail (see statement of evidence)
DATE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES



NAIL AND BOTTLE CAP
IN POWER POLE

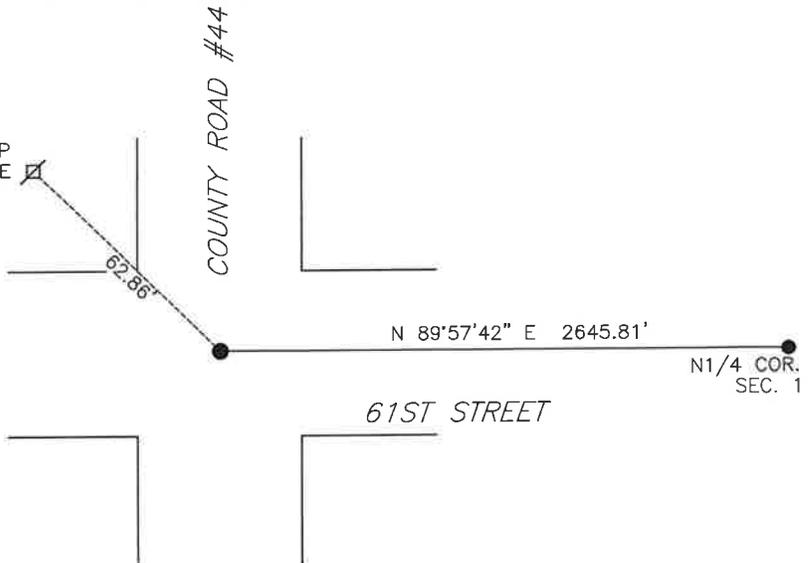

Murray County
Coordinate System NAD83 (1996)
N: 131799.823
E: 574880.672

WGS84
LAT: 43°56'05.7442"
LON: -95°28'56.7671"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

1/16/2026
DATE

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

NORTHEAST CORNER SECTION 2, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

A survey dated May 4, 1903 notes a "stone in grade" found at the corner.

A survey dated July 29, 1927 notes "iron stakes" at the corner.

A survey dated July 23, 1936 notes a concrete monument located at the corner and an iron pin placed above the monument.

A corner certificate by Bruce Shepperd, L.S. 17003, dated December 20, 1985 notes a $\frac{3}{4}$ " iron rod found at the corner.

County records dated March 28, 1990 notes two steel pins found at the corner down 2". Dug a 4'x6'x4.5 deep hole and found nothing. Replaced the two irons with one $\frac{1}{2}$ "x18" steel pin.

August 19, 2025, Bueltel-Moseng Land Surveying found a P.K. nail. Found one tie from 1975 and 1990 that fit. Accepted P.K. nail.