

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 2, Township 107, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 05-14-2007 found a 1/2" IRON
DATE

left monument as found, lowered monument, removed monument (explain)

On 05-14-2007 placed a 5/8" IRON WITH SEAL #43844
DATE

SKETCH OF REFERENCE TIES

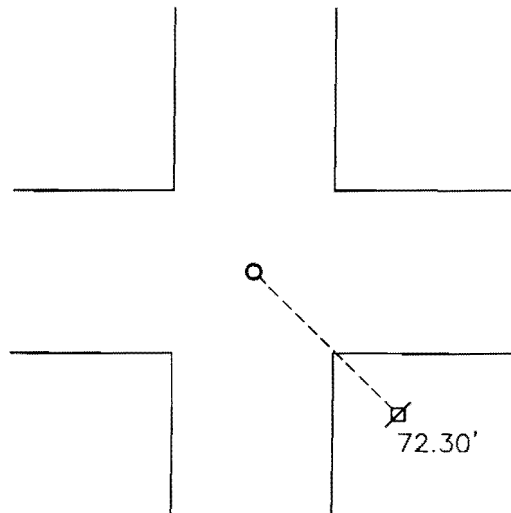

Minnesota State Plane Coordinate
System Murray County Datum
NAD83 (1996)

Nail and survey marker in power pole SE 72.30'

N: 195284.849
E: 479809.770

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


SIGNATURE

Feb. 20, 2008
DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1861, J. W. Myers did the survey of the south township line.

On April 18, 1979, the Murray County Highway Department found a concrete monument at the corner. They placed an steel pin over it.

On October 12, 1993, the Murray County Highway Department placed a PK nail at the road surface.

On May 14, 2007, Bueltel-Moseng Land Surveying found a PK nail at the road surface. We dug by hand and found a $\frac{1}{2}$ " iron. We set a $\frac{2}{8}$ " iron with seal #43844 at the road surface.