

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 25

Township 106 N, Range 39 W, 5th P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 07/09/2024 found a NOTHING

DATE

left monument as found, lowered monument, removed monument

On 12/23/2025 placed an IRON PIPE WITH CAP #44996

DATE

MURRAY COUNTY RECORDER

Karen Brown


FEB 17 2026

SKETCH OF REFERENCE TIES

(Not to Scale)

NAD83 (2011 ADJUSTMENT)
MURRAY COUNTY DATUM
(Units - US Survey Feet - English)

Corner ID/Point No. 86026

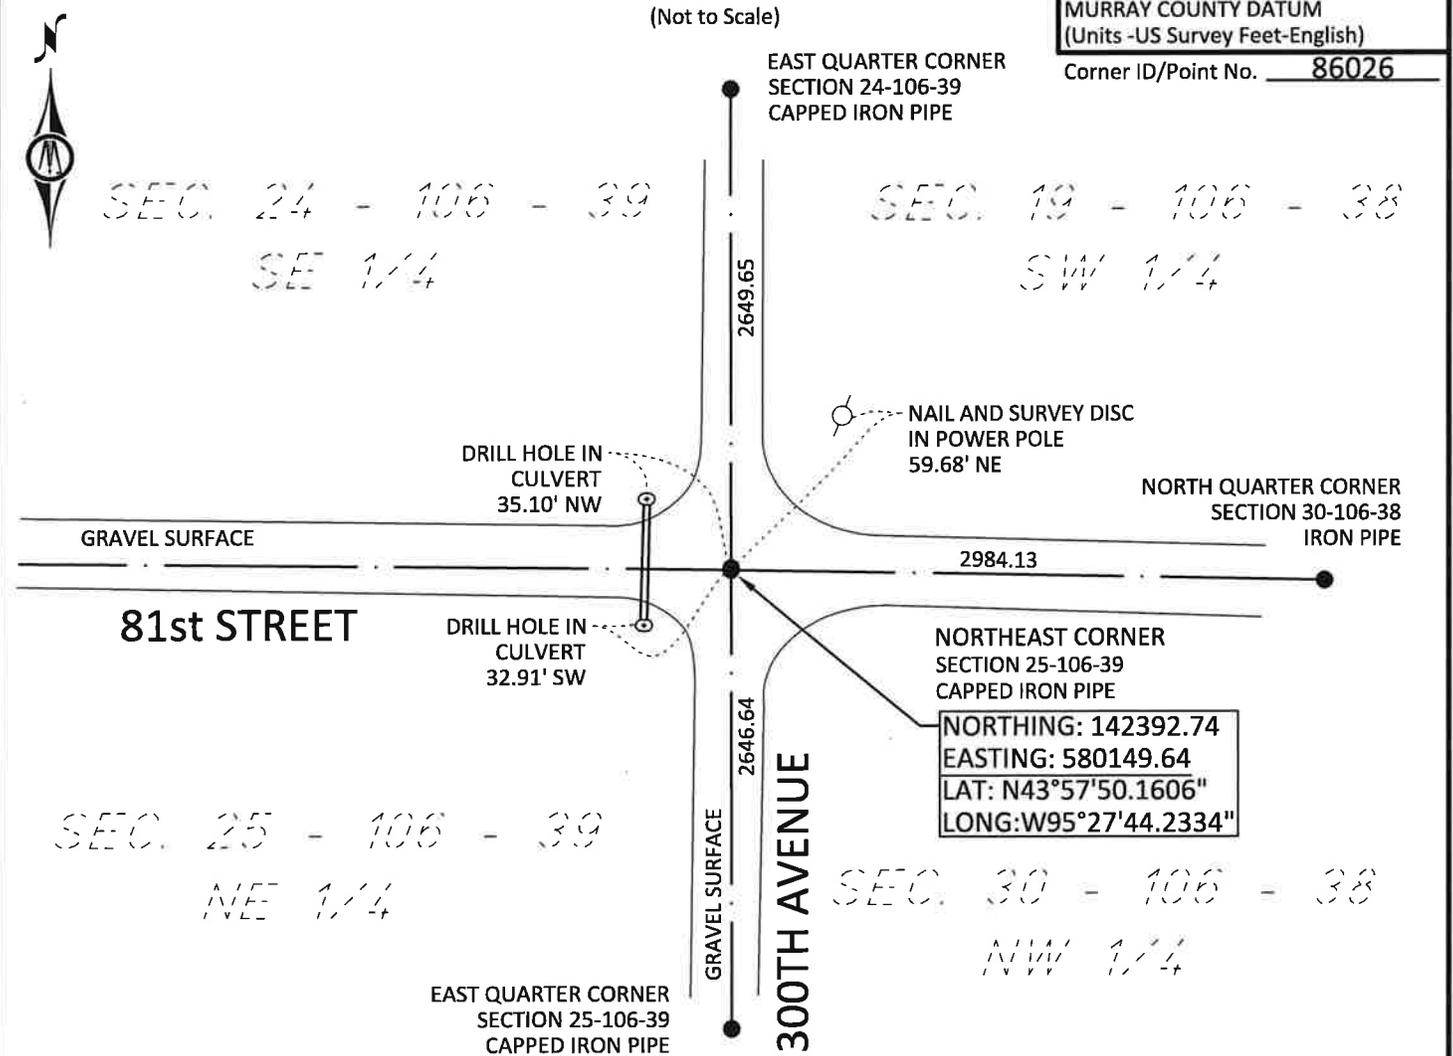

NORTHING: 142392.74
EASTING: 580149.64
LAT: N43°57'50.1606"
LONG: W95°27'44.2334"

Statement of evidence relative to this corner location is on following page(s).

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota. I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Jesse D. Zeig 2/10/26
Jesse D. Zeig DATE

Registration No. 44996



BOLTON & MENK

H:\COCO\051133845\CAD\C3D\133845V_BASE MURRAY CO.dwg 2/10/2026 1:37 PM

Statement of Evidence:

Northeast Corner of Section 25, Township 106 North, Range 39 West, 5th P.M.

- 1857 J.W. Meyers Deputy Surveyor set quarter post deposited charcoal made mound trench and pits and planted plum seed.
- 1898 C.W. Gove County Surveyor resurveyed the township and set a 1 ½" x 2 ½" cast iron monument .
- 2024 On July 9th a Bolton & Menk Inc, survey crew found nothing.
- 2025 On December 23rd a Bolton & Menk, Inc. survey crew placed an iron pipe with cap #44996 at a calculated position. The position was calculated using the resurvey distances. The position seems reasonable and is accepted as this corner.