

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 28, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 8/26/2025 found a 3"x2"x18" wooden hub over top of a 10"x12" field stone.

left monument as found,  lowered monument,  removed monument (explain)

On 2/4/2026 placed a 5/8" iron with seal #43844 over top of the stone.

SKETCH OF REFERENCE TIES

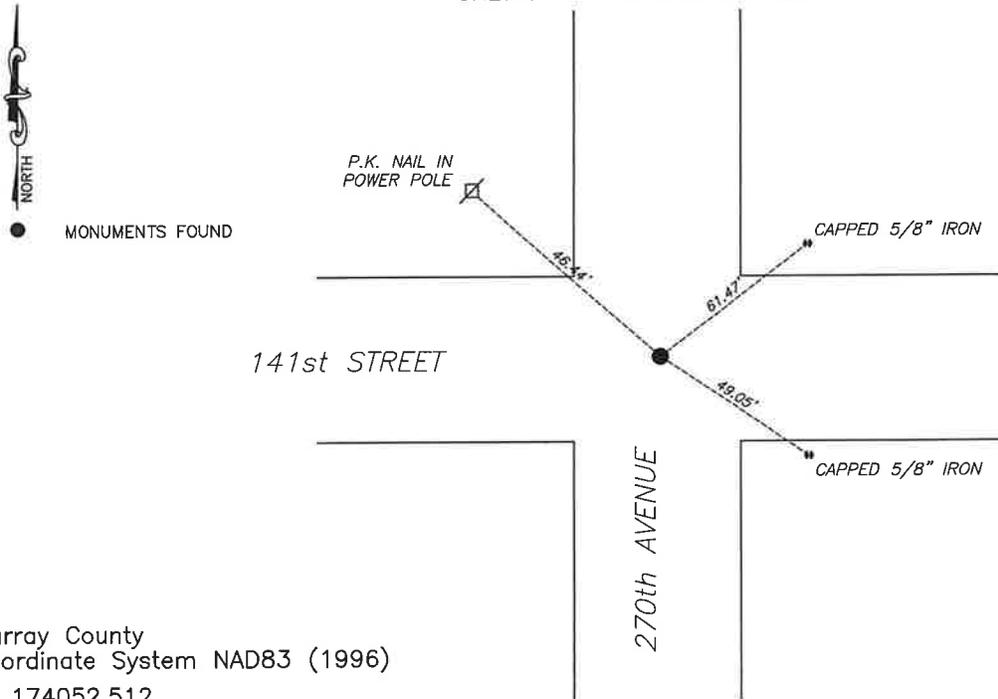

Murray County  
Coordinate System NAD83 (1996)

N: 174052.512  
E: 564182.078

WGS 84  
LAT: 44°03'03.3144"  
LON: -95°31'21.2508"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



Daniel L. Bueltel  
License No. 43844

2/5/2026  
DATE

**MURRAY COUNTY RECORDER**

*Karen Brown*

FEB 06 2026

## Statement of Evidence

**Northeast Corner Section 28, T107N, R39W of the 5th P.M.**

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey of section 28 by J.W. Woolstencroft dated November 15, 1904 notes a stone set at the corner.

On January 28, 2015 Zieske Land Surveying found an iron monument at the corner.

On August 27, 2020 Westwood Professional Services found a cut off T-post 1.3 feet below the road surface.

On August 26, 2025 Bueltel-Moseng Land Surveying found a cut T-post. Removed and dug with backhoe, found a 2"x2"x18" wooden hub, removed and kept digging and found a 10"x12" pointed field stone down 4.5± feet. Accepted the stone as the monument. On February 4, 2026 set a  $\frac{5}{8}$ " iron with seal #43844 over top of the stone.