


Corners to be Indexed

NE COR. 28-107-42
E1/4 COR. 28-107-42
S1/4 COR. 28-107-42
SW COR. 28-107-42


I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.



Daniel L. Bueltel
License No. 43844

7/30/2026
Date

JUL 31 2026


MURRAY COUNTY RECORDER


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Land survey monuments situated in Section 28, Township 107, Range 42, 5TH P.M.

STATE OF MINNESOTA, County of Murray



- FOUND MONUMENT
- SET MONUMENT

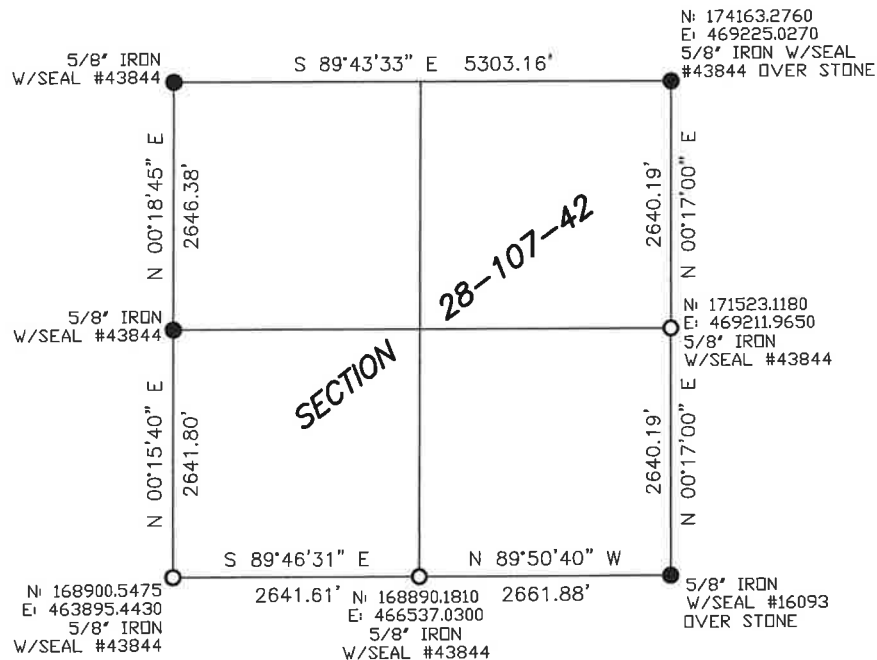

Murray County Coordinate System (1996 Adj.)

Statement of Evidence

June 1861 - J.W. Myers surveyed the original township lines.

July 1861 - L.G.M. Fletcher did the original subdivision of the township.

Northeast Corner Section 28, T107N, R42W of the 5th P.M.

March 1933 - A survey of Section 27-107-42 notes a stone placed at the corner.

February 7, 1934 - A survey of Section 28-107-42 notes a stone at the corner.

May 7, 2026 - Bueltel-Moseng Land Surveying dug with a backhoe and found a large field stone with pieces of rotted wood around it. Accepted the stone and set a $\frac{5}{8}$ " iron with seal #43844 on the west side of the stone for locating purposes.

May 14, 2026 - Set a $\frac{5}{8}$ " iron with seal #43844 over top of the found stone.

East Quarter Corner Section 28, T107N, R42W of the 5th P.M.

May 14, 2026 - Bueltel-Moseng Land Surveying searched the area and found nothing. Set a $\frac{5}{8}$ " iron with seal #43844 midway and on line between the section corners. Position fell in the centerline of the township road and in line with fence to the west.

South Quarter Corner Section 28, T107N, R42W of the 5th P.M.

May 9, 1902 - A Survey of section 33-107-42, by J.W. Woolstencroft, notes a 2"x10"x18" flat limestone at the corner.

May 7, 2026 - Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron with seal, set by Tim Bell L.S. 16093, at the location of the corner, probed along side and did not hit the stone from the 1902 survey. Dug a large hole with a backhoe at the location of the found iron and found no evidence of the stone monument. Accepted the location of the Tim Bell iron and set a $\frac{5}{8}$ " iron with seal #43844 at the position of the found iron.

Southwest Corner Section 28, T107N, R42W of the 5th P.M.

August 1899 - A survey of section 32-107-42 by J.W. Woolstencroft notes a 16"x16"x20" boulder at the corner

1902 - A survey of section 33-107-42 by J.W. Woolstencroft notes a stone in the road.

April 6, 1931 - A survey of Section 32-107-42 notes a concrete stone in place at the corner.

UNDATED - County records note a concrete stone at the corner.

May 14, 2026 Bueltel-Moseng Land Surveying set a $\frac{5}{8}$ " iron with seal #43844 at the corner using information from county highway plans.

Southeast Corner Section 28, T107N, R42W of the 5th P.M.

1902 - A survey of section 33-107-42 by J.W. Woolstencroft notes a stone in the road.

May 14, 2026 Bueltel-Moseng Land Surveying found a $\frac{5}{8}$ " iron with seal 16093. Probed next to iron and hit stone. Accepted found capped iron.