

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 29, Township 108, Range 41, 5TH P.M.

STATE OF MINNESOTA, County of Murray


At the corner location shown on the sketch:

☒ On 5/11/2026 found a 3/4" square iron 2'± below the road surface.
DATE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7/7/2026 placed a 3" survey spike with seal #43844 over found 3/4" iron.
DATE


SKETCH OF REFERENCE TIES

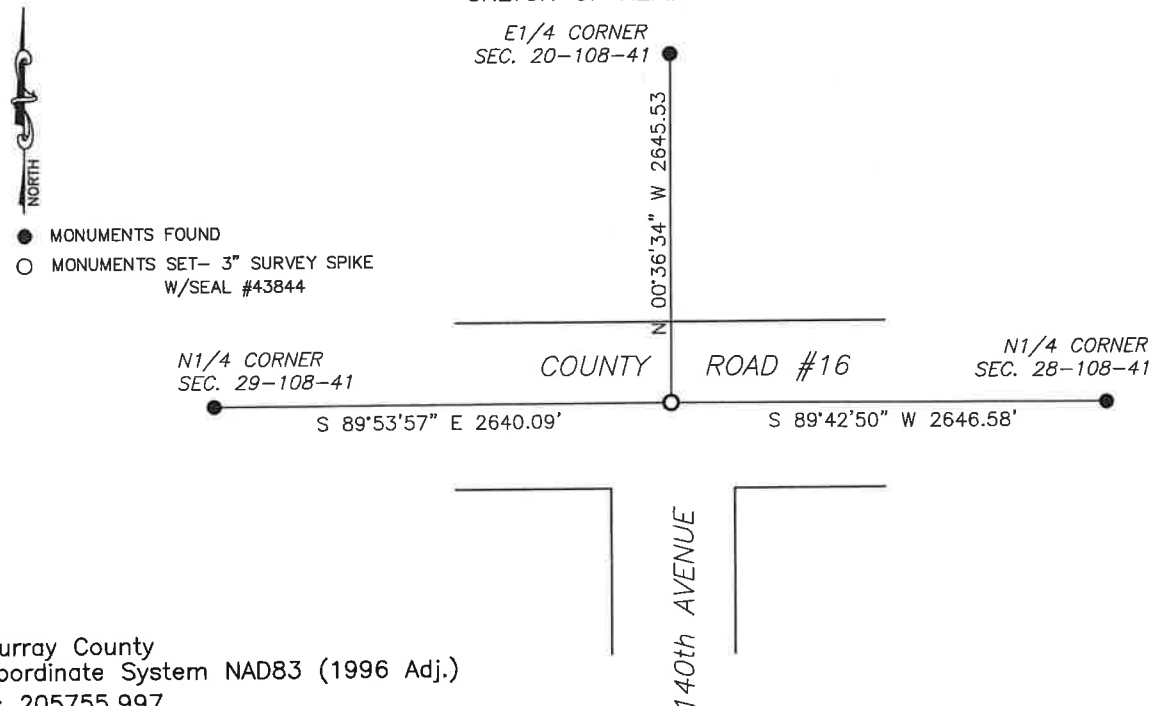

Murray County
Coordinate System NAD83 (1996 Adj.)
N: 205755.997
E: 495370.222

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.




Daniel L. Bueltel
License No. 43844

7/30/2026
DATE

RECORDING INFORMATION

JUL 31 2026



MURRAY COUNTY RECORDER

Statement of Evidence

Northeast Corner Section 29, T108N, R41W of the 5th P.M.

September, 1858 - W.J. Neely surveyed the North boundary of the township.

July, 1861 - J.W. Myers surveyed East, West, and South boundaries of the township.

September, 1861 - L.G.M. Fletcher subdivided the township.

June 4, 1907 - A survey of section 28-108-41 by J.W. Woolstencroft notes he set an old wagon axle at the location of the corner.

June 17, 1915 - A survey of Section 20-108-41 by J.R. Johnston notes a wagon axle located at the corner.

April 4, 1972 - Old survey records note a field stone located at the corner and a $\frac{3}{4}$ " rebar at a 45° angle over top of the stone.

October 3, 1997 - Zieske Land Surveying found a p.k. nail at the corner.

May 11, 2026 - Bueltel-Moseng Land Surveying searched the area and found a $\frac{3}{4}$ " rebar leaning at a 45° angle 2'± below the road surface, accepted the iron as the monument.

July 7, 2026 - Bueltel-Moseng Land Surveying set a 3" survey spike with seal #43844 over top of the found $\frac{3}{4}$ " iron after the county over lay project.