

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 3, Township 105 N, Range 41 W, 5 TH P.M.


STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

On 06/23/2017 found a IRON PIN NEAR INTERSECTION OF ROADS NORTH-SOUTH-EAST-WEST
DATE

left monument as found, lowered monument removed monument (explain)

On _____ place a _____
DATE

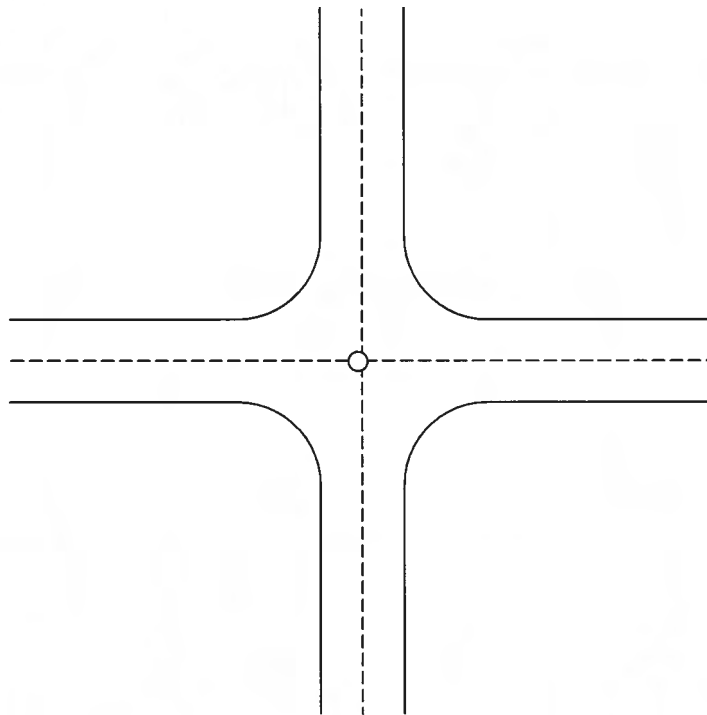

MURRAY COUNTY
COORDINATE
(2011 ADJUSTMENT)

N:131730.402
E:506086.960

Statement of evidence and reference ties relative to the corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature]
SIGNATURE

8-24-17
DATE

License No. 49020

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co Recorders office at _____
.M. on the _____ day of _____ A.D. 20

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence:

1861 – Corner established during survey of township exterior boundarys

1957 – MNDNR Assumed position for corner to be at the intersection of road centerlines north–south–east–west.

1970 – MNDNR set I.P. at corner from recorded distances of previous survey.

1973 – MNDNR found and used previously set I.P.

2017 – Jibben Surveying found an iron pin near the intersection of road center lines north–south–east–west. Held pin as corner.

SECTION 2
TOWNSHIP 105 NORTH, RANGE 41 WEST

