

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 30, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/22/2025 found a 2" iron pipe (see Statement of Evidence)
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6/10/2025 placed a 5/8" iron with seal #43844 over 2" pipe.
DATE

SKETCH OF REFERENCE TIES

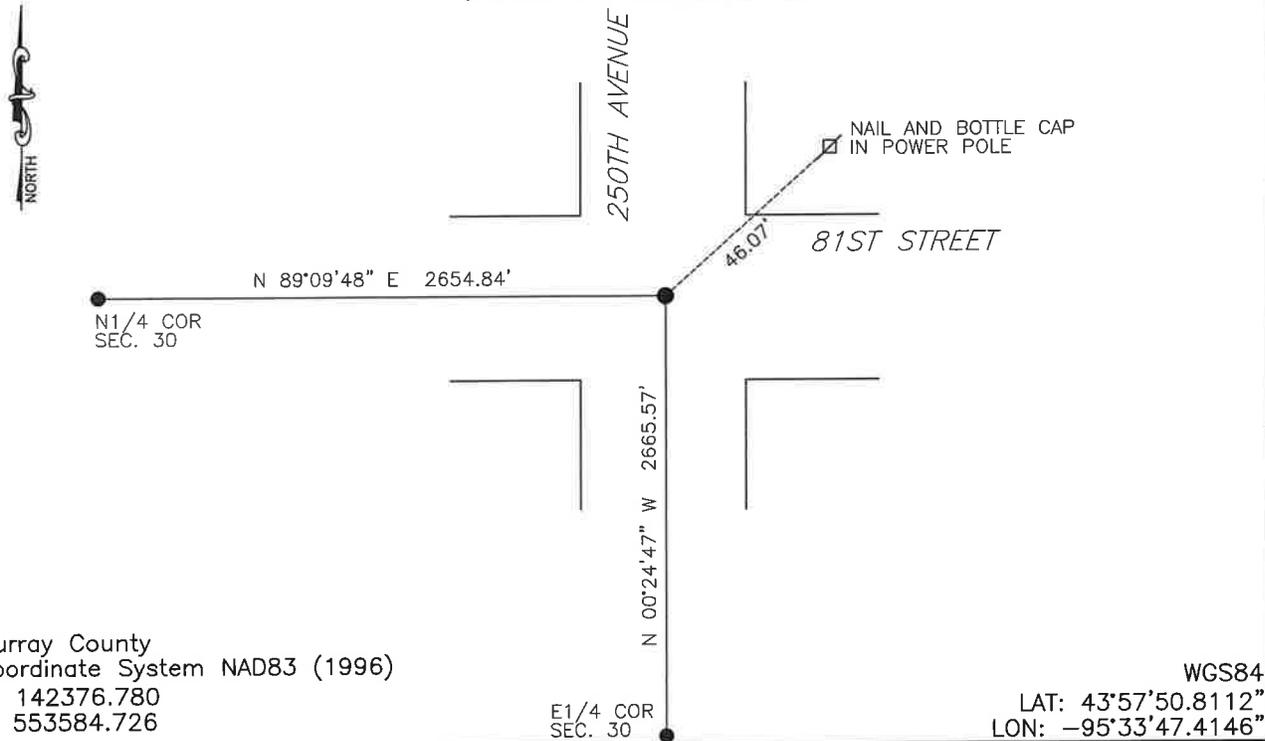

Murray County
 Coordinate System NAD83 (1996)
 N: 142376.780
 E: 553584.726

WGS84
 LAT: 43°57'50.8112"
 LON: -95°33'47.4146"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel 1/16/2026
DATE
 Daniel L. Bueltel
 License No. 43844

MURRAY COUNTY RECORDER

Karen Brown

JAN 20 2026

Statement of Evidence

NORTHEAST CORNER SECTION 30, T106N, R39W OF THE 5th P.M.

In September 1858 W.J. Neely surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In August of 1861 Wellman & Smoot subdivided the township.

A survey dated June 3, 1931 notes that the old corner was found.

May 22, 2025 Bueltel-Moseng Land Surveying dug with a backhoe and found 3/4" pipe, measured and continued digging. Found a 2" pipe (36" long) just below old road bed. Accepted position of 2" pipe.

June 10, 2025 Bueltel-Moseng Land Surveying set a 5/8" iron with seal #43844 over 2" pipe.