

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 33, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

On 7/9/2025 found a 5/8" iron with seal #23008 probed along side and hit the concrete monument below.


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES



● MONUMENTS FOUND

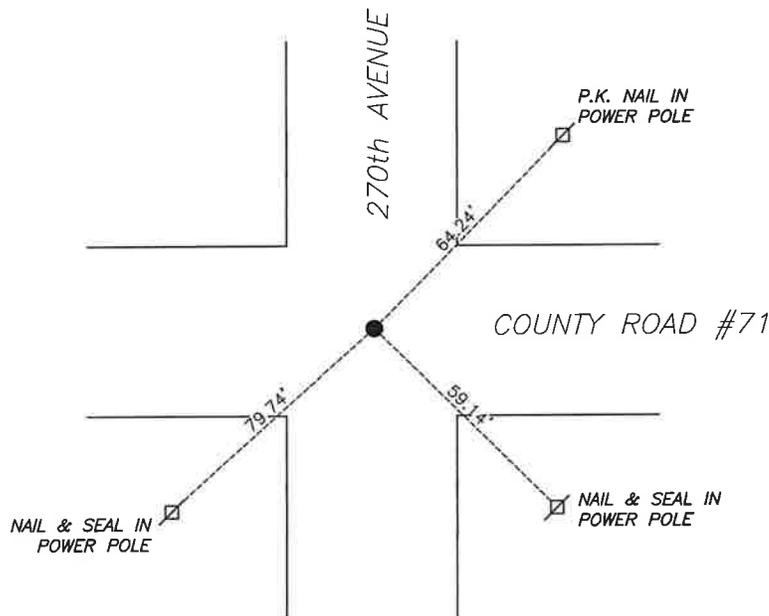

Murray County
Coordinate System NAD83 (1996)
N: 168759.700
E: 564219.149

WGS84
LAT: 44°02'11.0489"
LON: -95°31'20.9579"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

10/21/2025
DATE

OCT 24 2025

MURRAY COUNTY RECORDER

Statement of Evidence

Northeast Corner Section 33, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated November 15, 1904 notes a 10"x10"x16" blue stone at the corner.

County records dated 1934 notes that a blue stone was found at the corner and a concrete monument was placed above the stone.

County records dated April 27, 1981 notes a concrete monument found at the corner and placed a 6" rebar above the monument.

On July 25, 2013 Zieske Land Surveying found a 6"x6" concrete monument 3.1'± below the road surface and set a $\frac{5}{8}$ " iron with seal #23008 over top of the monument.

On August 27, 2020 Westwood Professional Services located a $\frac{5}{8}$ " iron with seal #23008 at the corner.

On July 9, 2025 Bueltel-Mosegng Land Surveying found a $\frac{5}{8}$ " iron with seal #23008, probed along side and hit the concrete monument beneath the iron. Accepted the iron as the monument.