

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 34, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of Murray

At the corner location shown on the sketch:

- On 7/17/2025 found a 8" cone shaped concrete monument down 5.5'± below road surface.
 left monument as found, lowered monument, removed monument (explain)
- On 7/30/2025 placed a 5/8" iron with seal #43844 over top of the concrete monument

SKETCH OF REFERENCE TIES

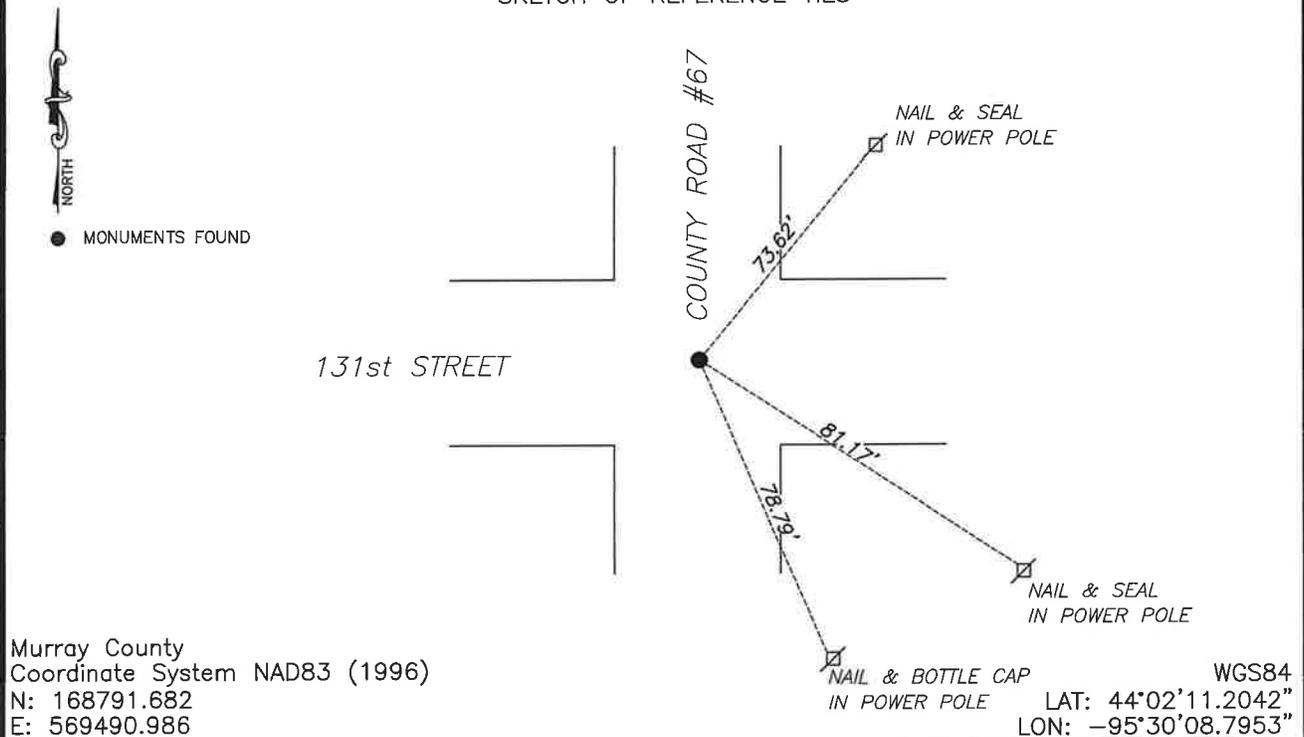

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel
License No. 43844

2/2/2026
DATE

MURRAY COUNTY RECORDER

Karen Brown

FEB 06 2026

Statement of Evidence

Northeast Corner Section 34, T107N, R39W of the 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey of section 35 dated February 5, 1934 notes a concrete monument at the corner.

A survey of section 26 notes an iron pin placed at the corner.

County records dated April 27, 1981 notes a steel pin at the corner, it also notes they did not dig deep enough to locate the stone.

County records dated May 21, 2012 notes a $\frac{1}{2}$ " steel pin found at the corner.

On July 18, 2025 Bueltel-Moseng Land Surveying found a $\frac{1}{2}$ " iron at the corner, removed and dug for the recorded concrete monument. Found a $\frac{3}{4}$ " rebar down $5'\pm$ below the road surface, recorded the position and continued digging. Found a 8" cone shaped concrete monument $5.5'\pm$ below the road surface, accepted the concrete monument as the corner. Returned on July 30, 2025 and set a $\frac{5}{8}$ " iron with seal #43844 over top of the concrete monument.