

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 5, Township 106, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 3/6/2025 found a P.K. nail
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/8/2025 placed a 3" survey spike with seal #43844 at the location of the
DATE found p.k. nail after overlay.

SKETCH OF REFERENCE TIES

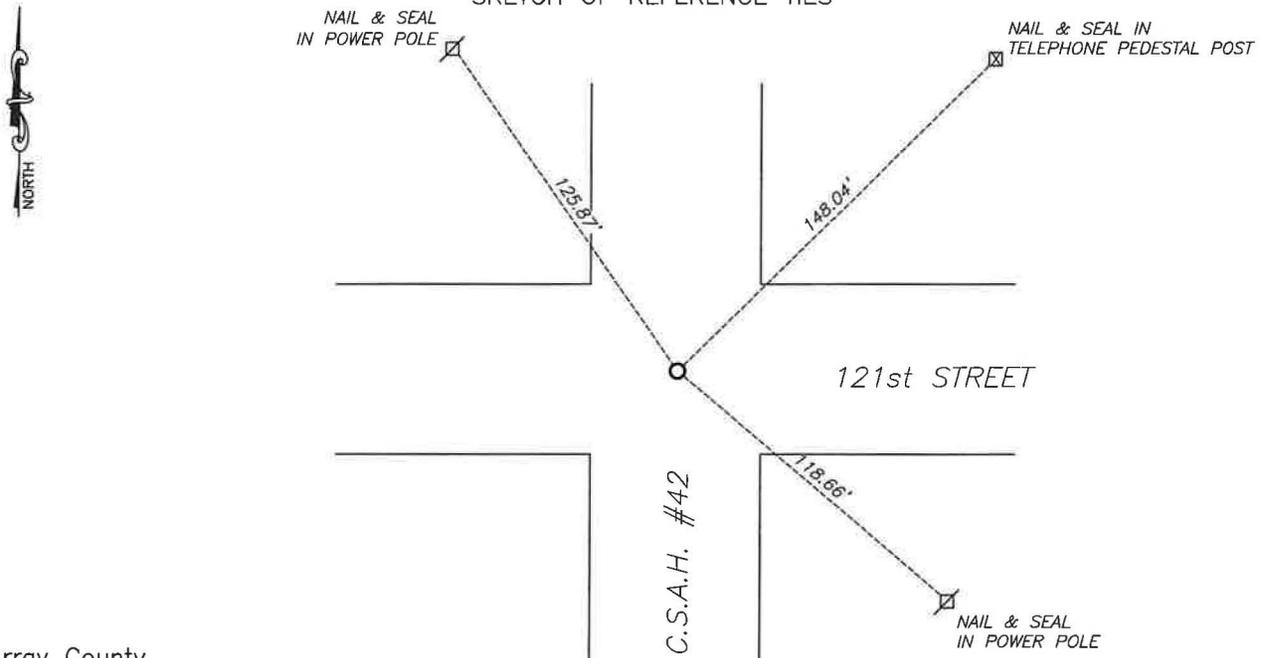

Murray County
Coordinate System NAD83 (1996)

N: 163466.956
E: 558872.361

WGS84

LAT: 44°01'18.9349"
LON: -95°32'34.3420"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


Daniel L. Bueltel
License No. 43844
10/21/2025
DATE

OCT 24 2025


MURRAY COUNTY RECORDER

Statement of Evidence

NORTHEAST CORNER SECTION 5, T106N, R39W OF THE 5th P.M.

In September 1858 W.J. Neely surveyed the east township line.

In July of 1861 J.W. Myers surveyed the north, south, and west township lines.

In August of 1861 Wellman & Smoot subdivided the township.

A survey by J.W. Woolstencroft dated June 6, 1895 notes a 4"x4"x9" stone at the corner.

County records dated August 29, 1986 notes that they dug a hole with a backhoe and found nothing. They also do not say if they set anything.

County Records dated August 28, 2007 notes Zieske Land Surveying found an iron monument at the corner.

On March 6, 2025 Bueltel-Moseng Land Surveying found p.k. nail at the corner

On October 8, 2025 and set a 3" survey spike with seal #43844 at the location of the found p.k. nail after overlay.