

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 6, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/14/2025 found a 1/2" iron with broken cap (unreadable).
DATE
 Probed next to iron and hit stone.
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

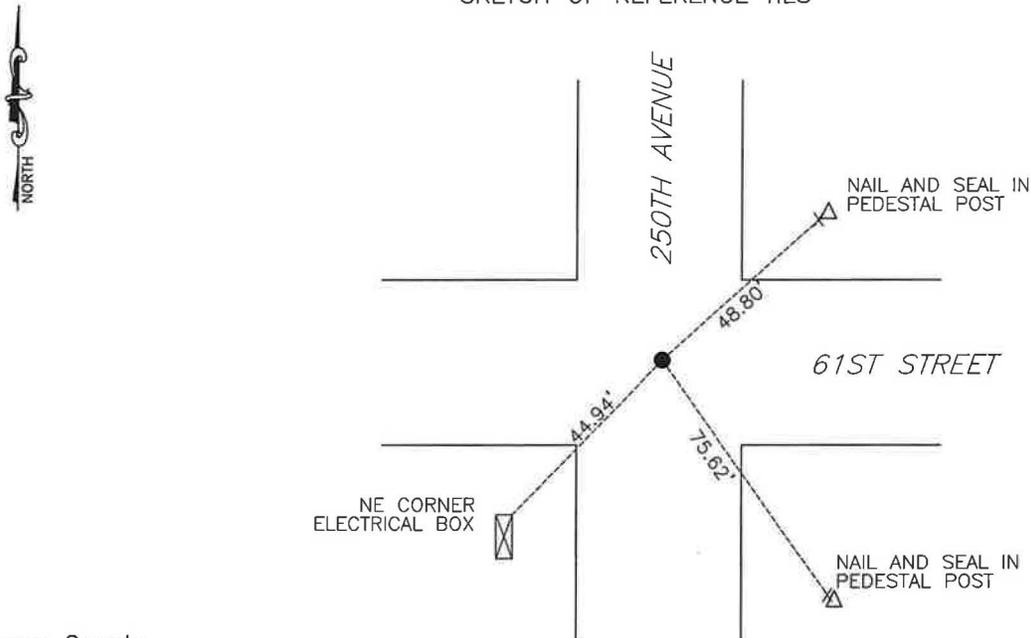

Murray County
 Coordinate System NAD83 (1996)
 N: 131735.584
 E: 553746.817

WGS84
 LAT: 43°56'05.7280"
 LON: -95°33'45.5587"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Daniel L. Bueltel 1/14/2026
DATE
 Daniel L. Bueltel
 License No. 43844

MURRAY COUNTY RECORDER
Karen Brown
 JAN 20 2026

Statement of Evidence

NORTHEAST CORNER SECTION 6, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

County records dated March 27, 1973 notes a field stone located at the corner.

May 14, 2025, Bueltel-Moseng Land Surveying, found a 1/2" iron with broken cap (unreadable). Probed next to iron and hit stone. Accepted position of 1/2" iron.