

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 8, Township 105, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY


At the corner location shown on the sketch:

On 3/6/2025 found a 3/8" iron (see statement of evidence)
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/8/2025 placed a 3" survey spike with seal 43844
DATE

SKETCH OF REFERENCE TIES

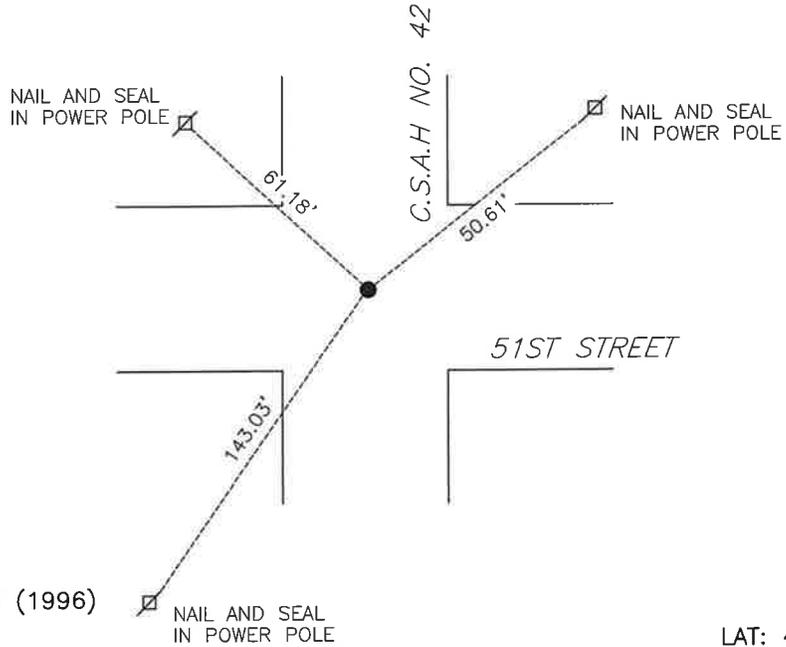


Murray County
Coordinate System NAD83 (1996)
N: 126441.703
E: 559061.756

WGS84
LAT: 43°55'13.3157"
LON: -95°32'33.1280"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.


Daniel L. Bueltel

License No. 43844

1/16/2026
DATE

MURRAY COUNTY RECORDER



JAN 20 2026

Statement of Evidence

NORTHEAST CORNER SECTION 8, T105N, R39W OF THE 5th P.M.

In September of 1858 W.J. Neely surveyed the south township boundary.

In July of 1861 J.W. Myers surveyed the North, East, and West township boundary lines.

In August of 1861 Wellman & Smoot subdivided the township.

1896 - J.W. Woolstencroft , Deputy County Surveyor, notes corner is in slough.

1940 - old survey notes a concrete stone was found.

March 28, 1972, Murray County Highway Department excavated corner and found concrete monument. Placed 12' steel post above monument.

No Date - Murray County Highway Department set steel pin in bituminous.

March 6, 2025, Bueltel-Moseng Land Surveying searched intersection for corner and found 3/8" steel pin down 8".

October 8, 2025, Bueltel-Moseng Land Surveying placed a 3" survey spike with seal 43844 over P.K. nail after overlay.