

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 27, Township 107, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of MURRAY

At the corner location shown on the sketch:

- On 5/7/2025 found a bent 1/2" iron, probed along side and hit concrete monument  
DATE beneath.  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

SKETCH OF REFERENCE TIES

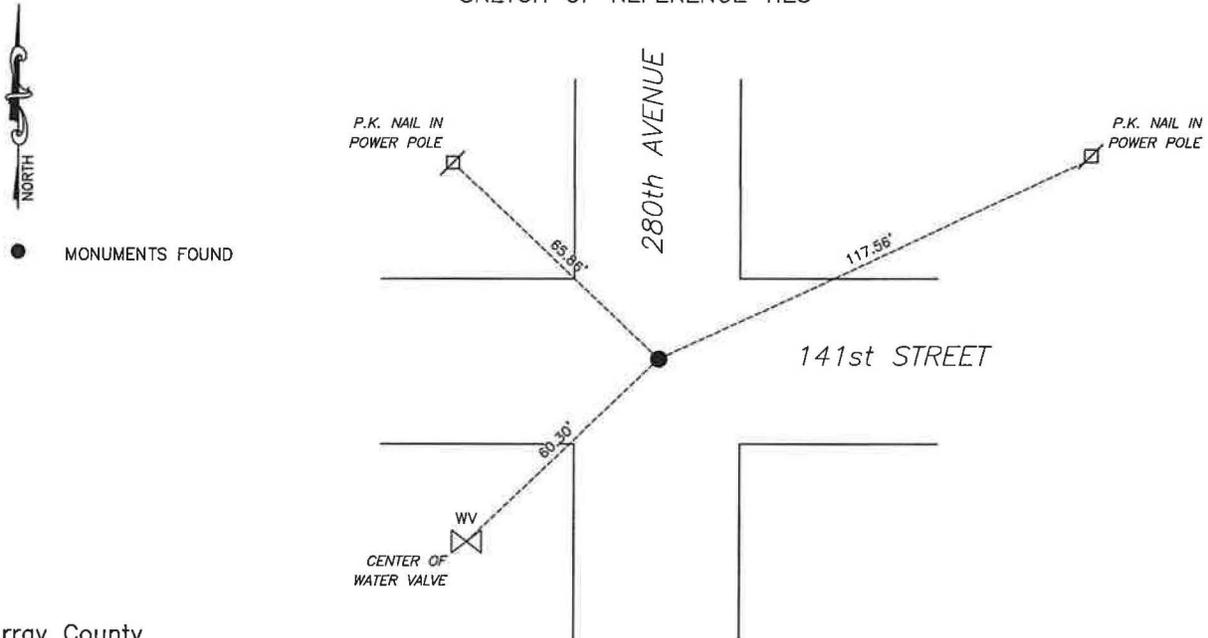

Murray County  
 Coordinate System NAD83 (1996)  
 N: 174078.327  
 E: 569465.740

WGS 84  
 LAT: 44°03'03.4084"  
 LON: -95°30'08.9089"

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Daniel L. Bueltel* 8/8/2025  
DATE  
 Daniel L. Bueltel  
 License No. 43844

AUG 12 2025

*Karen Brown*

**MURRAY COUNTY RECORDER**

Statement of Evidence

NORTHEAST CORNER SECTION 27, T107N, R39W OF THE 5th P.M.

In October of 1857 J.W. Meyers surveyed the east boundary of the township.

In July of 1861, J.W. Myers surveyed the remaining township lines.

In September of 1861, L. Brockmann subdivided the township.

A survey by J.W. Woolstencroft dated October 27, 1909 shows a concrete monument with an iron pin above for the corner.

County records dated April 4, 2000 shows Perry Zieske, LS #23008, shows a  $\frac{1}{2}$ " iron monument found at the corner.

On August 27, 2020 Westwood Professional Services located a  $\frac{1}{2}$ " iron at the corner.

On May 7, 2025 Bueltel-Moseng Land Surveying found a bent  $\frac{1}{2}$ " iron at the corner, probed along side and hit the concrete monument below, accepted the iron as the monument.